

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
REQUEST FOR FILING APPLICATION UNDER RULE 53(b)**

Pursuant to 37 CFR 1.53(b), please file a ☐ continuation/☒ divisional
of the pending prior PATENT APPLICATION of:

Inventor: NAKAMURA

Serial No. 09/132,215

Filed: August 11, 1998

For: **DECOMPOSITION APPARATUS OF ORGANIC COMPOUND, DECOMPOSITION METHOD
THEREOF, EXCIMER UV LAMP AND EXCIMER EMISSION APPARATUS**

Assistant Commissioner for Patents

Washington, DC 20231

Sir:

Atty Dkt.: 1767-72

C# M#

Date: October 25, 2000

Group: 1741

Examiner: Williams



10/25/00



This request for filing under Rule 53(b) is made by the following named inventor(s) (using the above-identified title):

Inventor(s): NAKAMURA

- ☒ Attached is a true copy of the prior application as originally filed including the specification, claims, Oath/Declaration and drawings (if any) and abstract (if any). No amendments (if any) referenced in the Oath or Declaration filed to complete the prior application introduced new matter.
- ☒ Priority is hereby claimed under 35 USC 119 based on the following foreign applications, the entire content of which is hereby incorporated by reference in this application:

<u>Application Number</u>	<u>Country</u>	<u>Day/Month/Year/Filed</u>
1. P09-28071	JAPAN	12/Feb/1997
2. P09-360940	JAPAN	26/Dec/1997
3. P10-127195	JAPAN	11/May/1998
4. P10-136229	JAPAN	19/May/1998

☐ certified copy(ies) of foreign application(s) attached or

☒ 2-4 already filed October 5, 1998 in prior appln. no. 09/132,215 filed August 11, 1998

☐ already filed in filed

☒ The prior application is assigned to Quark Systems Co., Ltd. and M. Watanabe & Co., Ltd..

☒ Power of Attorney has been granted to Arthur R. Crawford et al, Reg. No. 25,327 of Nixon & Vanderhye P.C., 1100 N. Glebe Rd., 8th Flr, Arlington, VA 22201.

☒ Address all future communications to: Nixon & Vanderhye P.C., 1100 N. Glebe Rd., 8th Floor, Arlington, VA 22201.

☒ Please amend the specification by inserting before the first line --This is a divisional of application Serial No. 09/132,215, filed August 11, 1998, now pending, the entire content of which is hereby incorporated by reference in this application.--

☒ "Small entity" statement of record. ☐ "Small entity" statement attached.

☒ The Examiner's attention is directed to the prior art cited in the parent application by applicant and/or Examiner for the reasons stated therein. A PTO-1449 listing those references is attached.

☒ Please enter the attached and/or below preliminary amendment **prior** to calculation of filing fee:

KINDLY CANCEL CLAIMS 19-24 WITHOUT PREJUDICE OR DISCLAIMER.

☒ The entire disclosure of the prior application above-referenced is considered as being part of the disclosure of this new application and is hereby incorporated by reference therein.

FILING FEE IS BASED ON CLAIMS AS FILED LESS ANY HERewith CANCELED

Basic Filing Fee			\$	710.00
Total effective claims	18	- 20 (at least 20) =	0	x \$ 18.00
			\$	0.00
Independent claims	2	- 3 (at least 3) =	0	x \$ 80.00
			\$	0.00
If any proper multiple dependent claims now added for first time, add \$270.00 (ignore improper)			\$	0.00
			SUBTOTAL	\$ 710.00
If "small entity," then enter half (1/2) of subtotal and subtract			-\$	(355.00)
			SECOND SUBTOTAL	\$ 355.00
			\$	0.00
Assignment Recording Fee (\$40.00)			TOTAL FEE ENCLOSED	\$ 355.00

Any future submission requiring an extension of time is hereby stated to include a petition for such time extension. The Commissioner is hereby authorized to charge any deficiency in the fee(s) filed, or asserted to be filed, or which should have been filed herewith (or with any paper hereafter filed in this application by this firm) to our **Account No. 14-1140**. A duplicate copy of this sheet is attached.

1100 North Glebe Road, 8th Floor
Arlington, Virginia 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100
MNL:slj

NIXON & VANDERHYE P.C.

By Atty: Michelle N. Lester, Reg. No. 32,331

Signature:

Our Ref.: 1767-72

U.S. PATENT APPLICATION

Inventor(s): Masaru NAKAMURA

Invention: DECOMPOSITION APPARATUS OF ORGANIC COMPOUND,
DECOMPOSITION METHOD THEREOF, EXCIMER UV LAMP AND
EXCIMER EMISSION APPARATUS

***NIXON & VANDERHYE P.C.
ATTORNEYS AT LAW
1100 NORTH GLEBE ROAD
8TH FLOOR
ARLINGTON, VIRGINIA 22201-4714
(703) 816-4000
Facsimile (703) 816-4100***

SPECIFICATION

DECOMPOSITION APPARATUS OF ORGANIC COMPOUND, DECOMPOSITION METHOD THEREOF, EXCIMER UV LAMP AND EXCIMER EMISSION APPARATUS

BACKGROUND OF THE INVENTION

The present invention relates to a decomposition apparatus of an organic compound by emission of an ultraviolet (UV) light which is irradiated from an excimer lamp, a decomposition method thereof and an excimer lamp and an excimer emission apparatus which may suitably be used for the decomposition apparatus and the decomposition method.

An organic compound causing air pollution or water pollution can be decomposed or eliminated by an activated carbon adsorption treatment, an oxidation decomposition treatment, an activated sludge treatment, a bio-oxidation treatment or the like. Among the treatments described above, the activated carbon adsorption treatment may suitably be used for the elimination of the organic compound causing water pollution.

As the problem of the activated carbon adsorption treatment, a high-priced activated carbon is generally used and therefore the activated carbon makes it necessary to recycle; a handling of the activated carbon is not easy since the activated carbon is of powdery; an apparatus of the activated carbon adsorption treatment is of comparatively large scale; a recycling treatment of the activated carbon and maintenance of the apparatus need much labors and costs.

Recently, we are in dilemma how to solve the problem described

above. Therefore, a method and an apparatus for decomposing easily the organic compound causing air pollution or water pollution at a low cost is requested.

SUMMARY OF THE INVENTION

The present invention was made in view of the above-mentioned circumstances. An object of the present invention is therefore to provide a decomposition apparatus by emission of a UV light which is irradiated from an excimer lamp, a decomposition method thereof and an excimer lamp and an excimer emission apparatus which may suitably be used for a decomposition apparatus and a decomposition method of an organic compound.

For the purpose of attainment of the above-mentioned object of the present invention, a decomposition apparatus for decomposing an organic compound fluid such as a gas of an organic compound, a liquid thereof, a gas containing an organic compound and a liquid containing an organic compound is decomposed. The decomposition apparatus comprises an excimer lamp emitting UV light for decomposing the organic compound, a decomposition container provided with an excimer lamp for decomposing the organic compound in the organic compound fluid. In the decomposition apparatus of the present invention, two or more decomposition container each having the excimer lamp may be jointed for flowing the fluid in the container to other container in order, and the organic compound in the fluid can be effectively decomposed. In case of the above-mentioned apparatus, it is preferable that the container is provided with a flow rate buffering material for

slowing down a flow rate of the fluid. It is preferable that a contact part between the fluid and a catalyst gas for promoting decomposition of the organic compound is equipped to the decomposition container. The excimer lamp, which may suitably be used for the decomposition apparatus, comprises a discharging vessel made of a dielectric material with excellent permeability of a UV light, an inner tube equipped on the inside of the discharging vessel, a protect tube equipped on the outside of the discharging vessel, an outer electrode equipped in the position between the protect tube and the discharging vessel, an inner electrode equipped on the inside of the inner tube, a filling gas filled up in the discharging vessel and a power supply for applying a voltage between the outer electrode and the inner electrode.

A decomposition apparatus for decomposing an organic compound in second mode of the present invention comprises an excimer emission body equipped with an inner electrode, a metal container equipped to the outside of the excimer emission body for filling up at least one selected from a liquid of an organic compound and a liquid containing organic compound, and a power supply for applying a high frequency voltage between the inner electrode and the metal container, and a UV light irradiated from the excimer emission body to the liquid in the metal container allows to generate OH radical and O radical into the liquid, and the radical cuts some bond of the organic compound so that the organic compound in the liquid is decomposed easily.

It is preferable that the excimer emission body comprises a discharging vessel made of a dielectric material with excellent permeability of a UV light, an inner tube equipped on the inside of the discharging vessel, an inner electrode equipped on the inside of the inner tube and a filling gas filled up in the discharging vessel. It is preferable that the power supply applies a high

frequency voltage from 1 to 20 MHz to the metal container and the inner electrode.

The organic compound used may be selected from flon, dioxin (polychlorinated dibenzo-para-dioxin), PCB (polychlorinated biphenyl), trichloroethylene, tetrachloroethylene, dichloromethane, tetrachloromethane, 1,2-dichloroethane, 1,1-dichloroethane, cis-1,2-dichloroethane, 1,1,1-trichloroethane, 1,3-dichloropropene and the mixture thereof. It is preferable that the UV light of wavelength of 222nm or below may suitably be used.

A decomposition method for decomposing an organic compound of the present invention may be used in the decomposition apparatus described above, and comprises steps of flowing a fluid which is selected from a gas of an organic compound, a liquid thereof, a gas containing an organic compound and a liquid containing an organic compound during the emission of a UV light which is irradiated from the excimer lamp, and decomposing the organic compound in fluid during its flowing. In this case, it is preferable that the fluid flows slowly in a flow rate buffering material during the emission of UV light. And, it is preferable that the fluid contacts a catalyst for promoting the decomposition of an organic compound during the emission of UV light. The organic compound used may be selected from flon, dioxin (polychlorinated dibenzo-para-dioxin), PCB (polychlorinated biphenyl), trichloroethylene, tetrachloroethylene, dichloromethane, tetrachloromethane, 1,2-dichloroethane, 1,1-dichloroethane, cis-1,2-dichloroethane, 1,1,1-trichloroethane, 1,3-dichloropropene and the mixture thereof. It is preferable that the UV light of wave length of 222nm or below may suitably be used.

An excimer lamp, which may suitable be used for the decomposition apparatus and the decomposition method described above, comprises a discharging vessel made of a dielectric material with excellent permeability of UV light, an inner tube equipped on the inside of the discharging vessel, an outer electrode equipped on the outside of the discharging vessel, an inner electrode equipped on the inside of the inner tube and a filling gas filled up in the discharging vessel, and a UV light is preferably irradiated from the excimer lamp by which a high frequency voltage is applied between the outer electrode and the inner electrode from 1 to 20 MHz. In this case, it is preferable that the inner tube is cooled by a nitrogen gas flowed in the inner tube. It is preferable that d/D ratio, in which the "d" is an inner diameter of the inner tube and the "D" is an outer diameter of the inner electrode, is of from 1.1 to 3.0, and that L/D ratio, in which the "L" is a length of the inner electrode and the "D" is an outer diameter of the inner electrode, is of from 10 to below 30.

An U-shaped inner tube of at least one or above, as the inner tube, may be equipped on the inside of the discharging vessel.

An excimer emission apparatus comprises the excimer lamp described above, a power supply for applying a high frequency voltage from 1 to 20 MHz between the outer electrode and the inner electrode and a circulating cooling apparatus by the nitrogen gas to cool the inner tube. In this case, it is preferable that d/D ratio, in which the "d" is an inner diameter of the inner tube and the "D" is an outer diameter of the inner electrode, is of from 1.1 to 3.0, and that L/D ratio, in which the "L" is a length of the inner electrode and the "D" is an outer diameter of the inner electrode, is of from 10 to below 30.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a schematic view illustrating a first embodiment of a decomposition apparatus (A) of the present invention.

FIG. 2 shows a schematic view illustrating a second embodiment of a decomposition apparatus (B) of the present invention.

FIG. 3 shows a schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp used for the decomposition apparatus of the present invention.

FIG. 4 shows a schematic view illustrating a third embodiment of a decomposition apparatus (C) of the present invention.

FIG. 5 shows a schematic view illustrating a fourth embodiment of a decomposition apparatus (D) of the present invention attached the excimer lamp.

FIG. 6 shows a schematic perspective view illustrating an embodiment of an excimer lamp used for the decomposition apparatus (C) in FIG. 4.

FIG. 7 shows a schematic view illustrating a fifth embodiment of a decomposition apparatus (E) of the present invention.

FIG. 8 shows a schematic view illustrating a sixth embodiment of a decomposition apparatus (F) of the present invention in.

FIG. 9 shows a schematic view illustrating a seventh embodiment of a decomposition apparatus (G) of the present invention.

FIG. 10 shows a schematic perspective view illustrating an

embodiment of a flow rate buffering material.

FIG. 11 shows a schematic view illustrating an embodiment of a manner of flowing of the liquid to the flow rate buffering material.

FIG. 12 shows a schematic view illustrating an eighth embodiment of a decomposition apparatus (H) of the present invention.

FIG. 13 shows a schematic perspective view illustrating an embodiment of a part of the inlet side of gas in the decomposition apparatus (H) shown in FIG. 12.

FIG. 14 shows a schematic longitudinal cross sectional view illustrating an embodiment of the flow rate buffering material for the gas in FIG. 12.

FIG. 15 shows a schematic view illustrating a ninth embodiment of an decomposition apparatus (I) of the present invention.

FIG. 16 shows a schematic longitudinal cross sectional view illustrating a tenth embodiment of a decomposition apparatus (J) of the present invention.

FIG. 17 shows a schematic longitudinal cross sectional view illustrating an embodiment of a excimer lamp of the present invention.

FIG. 18 shows a schematic cross sectional view illustrating an embodiment of the relationship between the inner tube and the inner electrode of the excimer lamp of the present invention.

FIG. 19 shows an schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp of the present invention.

FIG. 20 shows an schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp of the present invention.

FIG. 21 shows a schematic cross sectional view illustrating an

embodiment of the relationship between the inner tube and the inner electrode of the excimer lamp of the present invention.

FIG. 22 shows a schematic cross sectional view illustrating an embodiment of the relationship between the inner tube and the inner electrode of the excimer lamp of the present invention.

FIG. 23 shows a schematic cross sectional view illustrating an embodiment of the relationship between the inner tube and the inner electrode of the excimer lamp of the present invention.

FIG. 24 shows a schematic longitudinal cross sectional view illustrating an embodiment of the excimer lamp of the present invention.

FIG. 25 shows a schematic cross sectional view in perpendicular direction to lengthwise direction illustrating an embodiment of the excimer lamp as shown in FIG. 24.

FIG. 26 shows a schematic cross sectional view illustrating an embodiment of the U-shape inner tube used for the excimer lamp of the present invention.

FIG. 27 shows a schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp of the present invention.

FIG. 28 shows a schematic cross sectional view illustrating an embodiment of an excimer lamp in FIG. 27.

FIG. 29 shows a schematic view illustrating an embodiment of an excimer generating apparatus of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will now be explained with reference to figures.

A decomposition apparatus for decomposing an organic compound in first mode of the present invention will be explained. FIG. 1 shows a schematic view illustrating a first embodiment of a decomposition apparatus of the present invention. In FIG. 1, the decomposition apparatus A comprises an excimer lamp 1 and a decomposition container 2. The excimer lamp 1 is equipped to the decomposition container 2 to immerse in a liquid 3 of at least one selected from a liquid of an organic compound and a liquid containing an organic compound. The organic compound in liquid 3 is decomposed by emission of UV light irradiated from the excimer lamp 1.

The organic compound may suitable be selected from flon, dioxin (polychlorinated dibenzo-para-dioxin), PCB (polychlorinated biphenyl), trichloroethylene, tetrachloroethylene, dichloromethane, tetrachloromethane, 1,2-dichloroethane, 1,1-dichloroethane, cis-1,2-dichloroethane, 1,1,1-trichloroethane, 1,3-dichloropropene and the mixture thereof. All of the organic compound described above pollutes air or water and has a strong bond between carbon and chlorine. However, the organic compound in the liquid 3 can be decomposed easily by emission of the UV light irradiated from the excimer lamp 1 according to the present invention. The decomposition apparatus can decompose an organic halogen compound containing halogens element such as fluorine element or bromine element besides the organic compound described above.

The form of the container 2 is not limited to that of the container 2 in FIG. 1. It is preferable to use the container 2 in which the material thereof is unreactive to the liquid 3 and the UV light irradiated from the

excimer lamp 1 for example stainless steel or the like. The container 2 may be provided with an attachment hole 10 of the excimer lamp 1, an exhaust hole 5 of a decomposed gas 4 and an exhaust tube with carbon filter to exhaust gas. The container 2 may be provided with a mixer which is a stirrer with a stirrer chip 9 or a propeller mixer, to decompose efficiently.

FIG. 2 shows a schematic view illustrating a second embodiment of a decomposition apparatus (B) of the present invention. In the decomposition apparatus B as shown in FIG. 2, two or more containers 2 each having the excimer lamp 1 may be joints for flowing the fluid in one container to the other container in order. In the decomposition apparatus B, the liquid 3 is emitted by light irradiated from the excimer lamp 1 during flowing in the container 2 so that the organic compound in the liquid 3 is decomposed continuously and efficiently. According to the decomposition apparatus (B), the efficiency of decomposition and the quantity of decomposition treatment of the organic compound can be improved.

FIG. 3 shows a schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp used for the decomposition apparatus of the present invention. As shown in FIG. 1 and FIG. 2, the excimer lamp 1 is equipped to the container 2 to immerse in the liquid 3. The excimer lamp 1 comprises a discharging vessel made of a dielectric material with excellent permeability of UV light, an inner tube equipped on the inside of the discharging vessel, an outer electrode equipped on the outside of the discharging vessel, an inner electrode equipped on the inside of the inner tube and a filling gas filled up in the discharging vessel, and a UV light is preferably irradiated from the excimer lamp 1 by which a high frequency voltage is applied between the outer electrode and the inner electrode from 1 to

20 MHz. A power supply (no illustrating in figures) for applying a voltage of the high frequency between the outer electrode 34 and the inner electrode 35 of the excimer lamp 1, is equipped to the decomposition apparatus. The irradiated UV light is emitted in all directions from a surface of the excimer lamp 1 by the applying voltage. The detail of constitution of the excimer lamp 1 will be explained afterwards. The excimer lamp 1 may be provided with a supporting member 38 comprising a attachment member 37 for fitting the excimer lamp 1 to the container 2. The excimer lamp 1 may be attached anywhere and may be possible to desorb.

The excimer lamp 1 can irradiate the UV light of the different wavelength such as 172nm, 222nm and 308nm based on a kind of the filling gas. To the decomposition of the organic compound, it is preferable to emit the UV light of wavelength of 222nm or below, for example 172nm and 222nm, to the organic compound. By the emission of UV light of wavelength of 222nm or below, many excited oxygen atom is generated directly from oxygen in the liquid or air and have a strong oxidation force. Furthermore, since the UV light has the strong photon energy, a bond such as C-C, C-O, C-H and C-Cl of the organic compound is cut easily, the organic compound is decomposed by which the excited oxygen atoms attacks the position of the bond so that a decomposed material such as CO₂, H₂O or the like is generated. In FIG. 1, the decomposed material is released from the liquid 3 as the decomposition gas 4 and is exhausted through the exhaust tube 5 of the container 2.

FIG. 4 and FIG. 5 show a schematic view illustrating third and fourth embodiments of a decomposition apparatus C, D equipped with the excimer lamp unit 41, 51, which has excimer lamp, for emitting the liquid 3

into the container 42, 52. In FIG. 4 and FIG. 5, the excimer lamp unit 41, 51 of at least one or above are equipped on the sides of the containers 42, 52.

FIG. 6 shows a schematic perspective view illustrating an embodiment of an excimer lamp unit 41 used for the decomposition apparatus C in FIG. 4. The excimer lamp unit 41 has the excimer lamp 1 in a protect box 61 with one open window 62 and can be attached to the position 43 of the container 42 by an attachment member 63. According to the decomposition apparatus, the organic compound in the liquid 3 is decomposed by emission of the UV light irradiated from the excimer lamp 1.

As shown in the decomposition apparatus D of FIG. 5, at least one ring-shape excimer lamp unit 51 is equipped to the cylindric container 52.

FIG. 7 shows a schematic view illustrating a fifth embodiment of a decomposition apparatus E to decompose the organic compound in gas 72, which is evaporated by heat of the liquid 3, by emission of the UV light irradiated from the excimer lamp unit 71 which has excimer lamp. The kind of the heat apparatus 72, the position of the attachment thereof and the heating manner of the heat apparatus are not particularly limited. It is preferable that the excimer lamp 71 is equipped on the top plate of the container 72 to emit the gas 74 which may be either the gas of organic compound or the gas containing the organic compound.

FIG. 8 shows a schematic view illustrating a sixth embodiment of a decomposition apparatus F in which a route of a catalyst gas for promoting the decomposition of the organic compound is equipped to the container 82. The amount of flowing of the catalyst gas 86 is controlled by the flow control valve 89 equipped to the exit of the catalyst gas cylinder 80. The gas 74 evaporated from liquid comprising the organic compound, and catalyst gas

86 is contacted at a contact part 88 of the route 84 of the catalyst gas. The contact part 88 can be equipped with a contact material such as a net-shape material. When a pressure of the catalyst gas 86 in the route 84 is slightly higher than that of the gas 74 in the container 58, the catalyst gas 86 and the gas 74 can be contacted at just outside of the route 84 of the catalyst gas.

The catalyst gas 86 may be circulated as shown in FIG. 8. A contact material with a catalyst powder may be equipped to the contact part 88 instead of the catalyst gas 86. Consequently, under the condition described above,

the gas 74 is easily decomposed by emission of the UV light irradiated from the excimer lamp unit 71. The decomposed gas 85 is exhausted from the exhaust part 5 with the carbon filter 8. According to the decomposition apparatus, the efficiency of decomposition of the organic compound can be improved.

As the catalyst gas 86 or powder, it is preferable to use that of titanium oxide, magnesium oxide or the like, and the titanium in the titanium oxide or the magnesium in the magnesium oxide attacks the bonded part of C-Cl in particular so that the bonded part of that is cut easily.

FIG. 9 shows a schematic view illustrating a seventh embodiment of a decomposition apparatus G. As the decomposition apparatus G, the organic compound is decomposed by emission of the UV light during the liquid 3 of the organic compound flows down in the flow rate buffering material 93 which is equipped on the position in the neighborhood of the surface of excimer lamp unit 91 which has excimer lamp, in the container. The amount of flowing of the liquid 3 is controlled by the flow control valve 96 equipped to the flowing tube 95. The liquid 3 flows down slowly through the flow rate buffering material 93 from the inlet 97 to the container 92. The

organic compound in the liquid 3 is decomposed by emission of the UV light irradiated from the excimer lamp unit 91. When the organic compound can not be decomposed sufficiently, a treated liquid 101 is restored to the standing container 99, and is pumped by the circulation pump 104 equipped to the circulation tube 102 to restore in the container 94, and the organic compound in the liquid 3 is decomposed again thereafter. When the liquid flows down slowly in the flow rate buffering material 93 by the control of the flow control valve 96, the organic compound in the liquid 3 can be decomposed efficiently by emission of the UV light.

As the flow rate buffering material 93, it is preferable that the unreactive material on the UV light and the liquid 3, for example quartz, glass fiber, stainless steel or the like, is used and is worked in a net-shape, an asbestos-shape or a bundle-shape. FIG. 10 shows a schematic perspective view illustrating an embodiment of a flow rate buffering material. In FIG. 10, (a) shows the net-like flow rate buffering material 105, (b) shows the asbestos-shape flow rate buffering material 106.

When the liquid 3 flows down in the flow rate buffering material 93, as shown in FIG. 11, the liquid 3 passes the flow rate control valve 96 and the inlet tube 97, is separated by a separated tube 111 and flows down in the wide flow rate buffering material 93. By the flow rate buffering material described above, the efficiency of decomposition of the organic compound is improved since a large amount of the liquid 3 can flow down in the flow rate buffering material 93.

In FIG. 9, the catalyst gas 86 may flow into the decomposition apparatus G to improve the efficiency of decomposition of the organic compound. The catalyst gas 86 described above, which promotes the

decomposition of the organic compound in the liquid 3, and the liquid 3 is contacted at the flow rate buffering material 93. The decomposed gas 4 and the catalyst gas 86 may be exhausted from the outlet 5 by absorption of the pump 103. A contact material with the catalyst powder described above may be equipped to the flow rate buffering material 93 instead of the catalyst gas 86. The material of the catalyst gas 86 and powder is the same as that described above.

FIG. 12 shows a schematic view illustrating an eighth embodiment of a decomposition apparatus H for decomposing the gas 120 which is either the gas of the organic compound or the gas containing the organic compound.

The organic compound in the gas 120 is decomposed by emission of UV light irradiated from the excimer lamp unit 121, which has excimer lamp, during flowing up in the flow rate buffering material 126 which is equipped on the position in the neighborhood of the surface of the excimer lamp unit 121 in the container 122.

For improving the efficiency of decomposition of the organic compound, the gas 120 may flow up slowly in the flow rate buffering material 126 by the control of the flow rate control valve 125 or the adsorption pump 124. The flow rate buffering material 126 is the same as that described above. When the decomposition apparatus is not equipped with the flow rate buffering material 126, the organic compound in the gas 120 can be decomposed by the control of the flow rate.

In order to improve the efficiency of decomposition of the organic compound in the gas, it is preferable that the gas 120 flows with the same catalyst gas as that described above and passes in the flow rate buffering material with the same catalyst powder as that described above.

FIG. 13 shows a schematic perspective view illustrating an embodiment of a part on the inlet side of gas 120 in the decomposition apparatus H shown in FIG. 12. The upper part of the container 120 is equipped with a cylinder 131 of the gas 120, an inlet tube 133 of the gas 120, a flow rate control valve 132 of the gas 120, a cylinder 134 of the catalyst gas 86, an inlet tube 136 of the catalyst gas 86, and a flow rate control valve 135 of the catalyst gas 86.

FIG. 14 shows a schematic longitudinal cross sectional view illustrating an embodiment of the flow rate buffering material 126 used in FIG. 12. In FIG. 14, (a) is the hound's-tooth-shape flow rate buffering material 126a which is provided with the hindrance plate 141 of hound's-tooth in the container 122, (b) is the net-shape flow rate buffering material 126b which is provided with the net-shape member 142 of wave-shape in the container 122.

The flow rate buffering material 126 used in FIG. 14 may be used in the same manner as that of the flow rate buffering material 105, 106 as shown in FIG. 10.

FIG. 15 shows a schematic view illustrating a ninth embodiment of a decomposition apparatus I provided with the route 150 of the catalyst gas in the decomposition apparatus shown in FIG. 12. The route 150 of the catalyst gas is equipped to the container in the neighborhood of the flow rate buffering material 126 so that the catalyst gas promotes the decomposition of the organic compound in the gas 86 on the contacting part 151. In the decomposition apparatus I, the catalyst gas 120 and the gas 86 flows to the container through the different route. Therefore, in order to mix the gas 86 and the catalyst gas 120 in the container, it is preferable that a pressure of the catalyst gas 86 in the route 150 of the catalyst gas is slightly higher than that of the gas 3 in

the route of the gas 3. The catalyst gas 120 flows from holes of the contacting part 151 to the flow rate buffering material 126. The decomposed gas 123 is exhausted through the adsorption pump 124. The catalyst gas 120, except the catalyst gas flowed in the flow rate buffering material 126, is exhausted through the outlet part 153 of the catalyst gas. The catalyst gas 120 exhausted through an outlet part 153 may be used again by the circulation.

The flowing direction of the catalyst gas 120 may be opposed to the direction of flow of the gas 86. The other numericals are the same as those in figures described above.

According to the decomposition apparatus of the first mode of the present invention described above, since the UV light irradiated from excimer lamp or excimer lamp unit is emitted to the liquid or the gas containing the organic compound, the organic compound in the liquid or the gas can be decomposed easily by the simple decomposition apparatus and method. The decomposition apparatus and method are effective to decompose the organic chloride compound polluting the air or water, to purify the environment.

Next, a decomposition apparatus for decomposing the organic compound in the second mode of the present invention will be explained below. FIG. 16 shows a schematic longitudinal cross sectional view illustrating another embodiment of a decomposition apparatus J. In FIG. 16, the decomposition apparatus J comprises an excimer emission body 161 equipped with an inner electrode 35, a metal container 162 equipped to the outside of the excimer emission body 161 for filling up at least one selected from a liquid of an organic compound and a liquid containing organic compound, and a power supply for applying a high frequency voltage between the inner electrode 35 and the metal container 162.

The UV light is irradiated from the excimer emission body 136 by the applying of the voltage of the suitable frequency between the inner electrode 35 and the metal container 162 so that UV light is emitted to the liquid 3. The metal container 162 acts as the outer electrode shown in FIG. 3 so that the applying of voltage between the metal container 162 and the inner electrode 35 generates the high frequency discharge to irradiate the UV light.

Although the UV light of wavelength of 222nm or below is not generated the ozone in the liquid 3 or air, the UV light allows to generate the high reactive OH radical or O radical in the liquid 3. The radical cuts some bond of the organic compound so that the organic compound in the liquid 3 is decomposed efficiently to the decomposed material of CO₂, H₂O and so.

The excimer emission body 161 comprises the discharging vessel 31 made of the dielectric material with excellent permeability of UV light, the inner tube 32 equipped on the inside of the discharging vessel 31, the inner electrode 35 equipped on the inside of the inner tube 32 and the filling gas 36 filled up in the discharging vessel 31. The form of the excimer emission body 161 is not limited in particularly. The excimer emission body 161 is the same as that of the excimer lamp 1 of the decomposition apparatus of the first mode described above, except the displacement of the outer electrode 34 to the metal container 162 and to be not equipped with the protect tube 33. The decomposition apparatus shown in FIG. 3 is provided with the outer electrode 34 to the outer side of the discharging vessel 31 in usual. However, the decomposition apparatus J shown in FIG. 16 is provided with the metal container 162 filled up the liquid on the outer side of the excimer emission body 161. The metal container 162 acts as the outer electrode. The UV light is emitted to the liquid 3 efficiently because of without the outer

electrode, and therefore, the decomposition apparatus can improve the efficiency of decomposition of the organic compound. The component part equipped to the excimer emission body 161 is described below.

A nitrogen gas 164 may flow on the inside of the inner tube 32 of the excimer emission body 161 to cool. The kind of the nitrogen gas 164 is not limited particularly. The commercial nitrogen gas may be used. The inner tube 32 can be cooled sufficiently by flowing of the nitrogen gas 164 at a low temperature cooled by the heat exchanger (no illustrating in figures). The circulating cooling apparatus (no illustrating in figures) of the nitrogen gas is equipped to the decomposition apparatus J for supplying the nitrogen gas 164. The inner tube 32 can be prevented from deterioration so that the lifetime of the excimer emission body 161 can be improved.

As the metal container 162, it is preferable to use the stainless steel or the like which has a high conductivity and high corrosion resistance to the liquid 3 containing the organic compound. The metal container 162 has the property of shielding (so-called: EMI shield property) on the high frequency electromagnetic wave irradiated from the excimer emission body 161.

The voltage between the metal container 162 and the inner electrode 35 is of any frequency to irradiate the suitable amount of emission of UV light.

It is preferable to apply the high wavelength voltage from 1 to 20 MHz. The detailed explanation is described below. A position and a manner of attachment of the excimer generator 161 are not limited.

According to the decomposition apparatus described above, as the metal container 162 acts as the outer electrode and the container for filling the liquid 3, the construction of the decomposition apparatus can be simple. As the UV light is not hindered by the outer electrode, the liquid is emitted by

the UV light sufficiently. As the large amount of OH radical or O radical generates in the liquid, the bond of the organic compound is cut efficiently so that the organic compound is decomposed easily.

Next, an excimer lamp and an excimer emission apparatus used for the decomposition apparatus or the decomposition method of the organic compound described above will be explained by the reference in figures.

An excimer lamp will be explained below. FIG. 17 shows a schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp of the present invention. The excimer lamp 171, such as explained in FIG. 3, comprises the discharging vessel 31 made of a dielectric material with excellent permeability of UV light, the inner tube 32 equipped on the inside of the discharging vessel 31, the outer electrode 34 equipped on the outside of the discharging vessel 31, the inner electrode 35 equipped on the inside of the inner tube 32 and the filling gas 36 filled up in the discharge vessel 31. The UV light is preferably irradiated from the excimer lamp 171 by which a high frequency voltage is applied between the outer electrode and inner electrode 32 from 1 to 20 MHz. The UV light is emitted from the excimer lamp 171 to the liquid. A protect tube (not illustrating in figures) may be equipped on the outside of the discharging vessel 31. The outer electrode 34 may be equipped to the position between the protect tube and the discharging electrode 34. The discharging vessel and the protect tube may be made of dielectric material with permeability of the UV light. It is preferable to use a quartz or a synthetic quartz with a high permeability.

The filling gas 36 is filled in the discharging vessel 31 for discharging the excimer lamp 171. The wavelength of the UV light varies by the kind of the filling gas. As the filling gas 36, it is preferable to use the

gas of He, Xe, Kr, Ar, ArF, ArCl, KrF, XeF, XeCl, XeBr, F₂-Kr-He or the like. A pressure and a kind of gas in the discharging vessel 31 are determined by the suitable condition to obtain a required wavelength and a required amount of irradiation of UV light. It is preferable to fill the pressure of from 10 to 60 kPa. The other things are explained in FIG. 3.

The inner tube 32 also uses a quartz or a synthetic quartz with dielectric. It is preferable that the inner tube 32 is equipped to the center of the discharging vessel 131 so that the excimer lamp can be uniformly emitted the UV light on the around of the inner tube 32. As shown in FIG. 16, the nitrogen gas 164 flows in the inner tube 32. Since the inner tube 32 is cooled by the nitrogen gas 164, the deterioration of the inner tube 31 can be prevented and is the same as that of the discharging vessel 31 so that the lifetime of the excimer lamp can be improved.

FIG. 18 shows a schematic cross sectional view illustrating an embodiment of the relationship between the inner tube and the inner electrode of the excimer lamp of the present invention. It is preferable that d/D ratio, which the "d" is an inner diameter of the inner tube and the "D" is an outer diameter of the inner electrode 35, is from 1.1 to 3.0 for flowing the nitrogen gas 164 in the inner tube 32 easily. When the d/D ratio is below 1.1, the space between the inner tube 32 and the inner electrode is not enough so that the nitrogen gas 164 can not flow in the inner tube 32 and the inner tube 32 can not be enough cooled by the nitrogen gas 164. When the d/D ratio is above 3.0, the nitrogen gas 164 flows easily so that the inner tube 32 is cooled sufficiently. In this case, however, it is not preferable that the outer diameter of the inner tube becomes thick and that of the excimer lamp becomes thick, too, or the excimer lamp can not be discharged uniformly

since the outer diameter of the inner electrode 35 becomes thin. Therefore, the d/D ratio is limited from 1.1 to 3.0.

As the inner electrode 31, it is preferable to use stainless steel, aluminum, aluminum alloy, copper, copper oxide, alloy containing of copper, alloy containing copper oxide or the like. The inner electrode 35 does contact the filling gas 36 so that the high frequency discharge happens on all parts of the inner tube 32.

FIG. 19 and FIG. 20 show an schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp of the present invention, respectively. FIG. 21 to FIG. 23 show a schematic cross sectional view illustrating an embodiment of the relationship between the inner tube and the inner electrode of the excimer lamp of the present invention.

When both ends of the inner tube 192 are open, it is preferable to use the rod-shaped inner electrode 35. As a result, the inner tube 192 can be cooled sufficiently because of flowing easily the nitrogen gas 164 from one end side to the other end side. When one end of the inner tube 35 is closed,

it is preferable to use the hollow pipe-shape inner electrode 211 (as shown in FIG. 21). As a result, the inner tube 32 can be cooled sufficiently since the nitrogen gas 164 flows from the inside of the electrode 211 to the outside of the electrode 211. When the form of the inner electrode is the hollow pipe-shaped, it is preferable that d/D ratio, in which the "d" is a inner diameter of the inner tube 32 and the "D" is an outer diameter of the hollow pipe-shape inner electrode 211, is in the range of that described above.

When one end of the inner tube 32 is closed, the rod-shape inner electrode may be used. As shown in FIG. 22, the insertion tube 221 may be inserted to the suitable position along the inner electrode 35 so that the

nitrogen gas 164 can flow in the inner tube 32 easily. Furthermore, as shown in FIG. 23, the inner electrode 231 of the flat-shape may be used for separating the inlet-side and the outlet-side of the nitrogen gas 164 so that the nitrogen gas 164 can flow in the inner tube 32 easily.

It is preferable that L/D ratio, in which the "L" is a length of the inner electrode 35, 211, 221 and the "D" is an outer diameter of the inner electrode, is of from 10 to below 30. The length L of the inner electrode is in proportion to that of the excimer lamp 1, 161, 171, 191, 201, and the length of the inner electrode is determined by that of the excimer lamp.

With the increase of the outer diameter D of the inner electrode, the outer diameter of the inner tube and the discharging vessel becomes thick so that the outer diameter of the excimer lamp becomes thick, too.

When the L/D is below 10, the inner tube is cooled sufficiently by the nitrogen gas flowed in the inner tube since the outer diameter of the inner electrode and the excimer lamp becomes thick. Consequently, the efficiency of emission of the UV light is not improved since the surface area of the excimer lamp decreases.

When the L/D is 30 or above, the inner tube becomes longer, and the nitrogen gas cannot flow sufficiently in the inner tube so that the inner tube is not cooled sufficiently. Therefore, the L/D is limited from 10 to 30 below.

As the outer electrode 34, it is preferable to use a material made of stainless steel, aluminum or the like. Any electrode of punching metal shape, mesh shape or net shape may be equipped around of the discharging vessel 31. The electrode of rod shape or oblong shape may be equipped lengthwise of the discharging vessel 31. When the electrode of punching

metal shape, mesh shape or net shape is used, the shield property of the excimer lamp is improved on an electromagnetic wave of high frequency (so-called: EMI shield). When the electrode of the rod shape or the oblong shape is used, the UV light is emitted from the surface of the excimer lamp sufficiently since a large amount of the UV light can irradiate from the excimer lamp.

In the excimer lamp, a protect tube may be provided on the outer side of the outer electrode 34, if necessary, and a nitrogen gas may introduced into the space between the protect tube and the discharging vessel 31.

The amount of the UV light increases with the applying of high frequency voltage so that the efficiency of irradiation of the UV light increases.

Therefore, since the thermal efficiency of the excimer lamp and the irradiation efficiency of UV light is high, the excimer lamp can save electricity and is of economical. It is preferable that the frequency of voltage applied to the excimer lamp is of from 1 to 20 MHz, particularly of from 5 to 16 MHz, furthermore preferably of from 11 to 15 MHz. In this case, it is preferable that the high frequency voltage outputted from the power supply 163 is of from 0.1 to 10 V, particularly of from 0.1 to 5 V. When the voltage is below 0.1 V, the large amount of the UV light can not irradiate since the high frequency discharge can not happen between the outer electrode 34 and the inner electrode 35 sufficiently. When the voltage is above 10V, the amount of the UV light saturates so that the irradiation efficiency of the UV light does not increase and the excimer lamp does not save electricity.

According to the excimer lamp of the present invention, since the inner tube is cooled by flowing the nitrogen gas, the deterioration of the inner

tube can be prevented and is the same as that of the discharging vessel so that the lifetime of the excimer lamp can be improved. The excimer lamp, which can irradiate the UV light of wave length of 222nm or below, can prevent the deterioration of the inner tube. The nitrogen gas used can be treated safely and the construction of the excimer lamp can be simple.

FIG. 24 shows a schematic longitudinal cross sectional view illustrating an embodiment of the excimer lamp of the present invention. The excimer lamp 241 is equipped with the U-shape inner tube 242 on the inner side of the discharging vessel 31. FIG. 25 shows a schematic cross sectional view illustrating an embodiment of the excimer lamp as shown in FIG. 24.

FIG. 26 shows a schematic cross sectional view illustrating an embodiment of the U-shape inner tube 242 used for the excimer lamp of the present invention.

At least one U-shape inner tube 242 is equipped on the inside of the discharging vessel 31. The inner tube 242 is usually made of the quartz, the synthetic quartz or the like, having dielectric property. Since the inner electrode 243 is equipped on the inside of the inner tube 242, the discharging vessel 31 with the inner tube 242 is almost the same as that of a discharging vessel with two inner electrodes so that the opportunity of high frequency discharge in the excimer lamp increases. The increase of the opportunity of high frequency discharge can extremely improve the irradiation efficiency of the UV light.

As the inner electrode 243 as shown in FIG. 26(a), it is preferable to use the liquid metal 244, especially mercury. The liquid metal 244 can flow in the U-shape inner tube 242 easily so that the U-shape inner electrode and the excimer lamp become thin. As shown in FIG. 26(b), the inner electrode 243 may be the electrode 245 of the net-shape. As the electrode

245 of net-shape metal 245, it is preferable to use that made of the copper wire.

FIG. 27 shows a schematic longitudinal cross sectional view illustrating an embodiment of an excimer lamp 271 of the present invention.

FIG. 28 shows a schematic cross sectional view illustrating an embodiment of an excimer lamp 271 in FIG. 27. The excimer lamp 271 is equipped with the two U-shape inner tubes 242 to the inside of the discharging vessel 31 so that the opportunity of the high frequency discharge between the outer electrode and the inner tube 242 increases. Consequently, the irradiation efficiency of the UV light can be improved.

Last, an excimer emission apparatus of the present invention will be explained as follows.

FIG. 29 shows a schematic view illustrating an embodiment of an excimer emission apparatus 291 of the present invention. The excimer emission apparatus 291 comprises the excimer lamp of the present invention described above (for example, the numerical number is 201), a high frequency power supply 163 for applying the voltage from 1 to 20 MHz between the outer electrode 35 and the inner electrode 35, a circulating cooling apparatus 292 for flowing the nitrogen gas in the inner tube 32. The detail explanation of the excimer lamp is described above.

The nitrogen gas circulates in the inner tube 32 to cool it. Since the deterioration of the inner tube cooled by UV light and the heat becomes slowly, the degree of deterioration of the inner tube can be the same as that of the discharging vessel 31. Consequently, the lifetime of the excimer lamp can be improved.

The high frequency power supply 163 can apply the voltage of the

high frequency from 1 to 20 MHz between the outer electrode 34 and the inner electrode 35 of the excimer lamp 20. The construction of the excimer lamp is not limited that of shown in FIG. 29. In the case of the excimer emission apparatus 291 as shown in FIG. 29, the high frequency power supply 163 is provided at a power supply apparatus 293 as a main element. The high frequency power supply 163 may comprises the other component, for example, a matching controller 294, variable capacitors C1, C2 or the like.

The power supply apparatus 293 as shown in FIG. 29 comprises the high frequency power supply 163, the matching controller 294, inductances L1, L2 and the variable capacitors C1, C2, as fundamental element. The alternating power supply 295 applies an electrical power of approximately 100V to the power supply apparatus 293. The high frequency power supply 163 converts the electrical power to that of the predetermined frequency from 1 to 20 MHz. The frequency converted is output from the high frequency power supply 163. It is preferable that the voltage of the high frequency described above is of from 0.1 to 10 V, particularly of from 0.1 to 5V. The control of the variable capacitor C1 by the matching controller 294 matches the impedance Z1 outputted from the high frequency power supply 163 with the impedance Z2 inputted on the excimer lamp 201. Consequently, In the circuit in the power supply apparatus 293 shown in FIG. 29, the excimer lamp 201 irradiates the UV light at a high efficiency.

In the excimer emission apparatus of the present invention, the excimer lamp 201 generates the high frequency discharge by applying the electrical power from 25 to 30 W with the high frequency of 13.56 MHz, to irradiate 10 mW/cm^2 of the UV light from the excimer lamp 201. However, in a prior excimer emission apparatus, the excimer lamp generates the

dielectric barrier discharge by applying the electrical power of 50W with the voltage from 1 to 10 kV of any frequency from 40 to 300 kHz, to irradiate 10 mW/cm² of the UV light from the prior excimer lamp. Therefore, the excimer emission apparatus of the present invention converts the input energy to the UV light efficiently so that the generation of heat of the excimer lamp decreases. The lifetime of the prior excimer lamp, consequently, is shorter than that of the excimer lamp of the present invention since the prior excimer lamp generates more the deterioration due to generation of heat than that of present invention.

WHAT IS CLAIMED IS :

1 A decomposition apparatus for decomposing an organic compound fluid such as a gas of an organic compound, a liquid thereof, a gas containing an organic compound, and a liquid containing an organic compound, which comprises:

an excimer lamp emitting UV light for decomposing said organic compound, and

a decomposition container provided with an excimer lamp for decomposing said organic compound in said organic compound fluid.

2 A decomposition apparatus as claimed in Claim 1, wherein

two or more decomposition containers each having said excimer lamp are jointed for flowing said fluid in one container to the other container in order.

3 A decomposition apparatus as claimed in Claim 1, wherein

said container is equipped with a flow rate buffering material for slowing down a flow rate of said fluid.

4 A decomposition apparatus as claimed in Claim 1, wherein

said decomposition container is equipped with a contact part between said fluid and a catalyst gas for promoting decomposition of the organic compound.

5 A decomposition apparatus as claimed in Claim 1, wherein

an organic compound to be decomposed selected from flon, dioxin (polychlorinated dibenzo-para-dioxin), PCB (polychlorinated biphenyl), trichloroethylene, tetrachloroethylene, dichloromethane, tetrachloromethane, 1,2-dichloroethane, 1,1-dichloroethane, cis-1,2-dichloroethane,

1,1,1-trichloroethane, 1,3-dichloropropene and a mixture thereof.

6 A decomposition apparatus as claimed in Claim 1, wherein said excimer lamp comprises:

a discharging vessel made of a dielectric material with excellent permeability of UV light,

an inner tube equipped on the inside of the discharging vessel,

a protect tube equipped on the outside of the discharging vessel,

an outer electrode equipped in the position between the protect tube and the discharging vessel,

an inner electrode equipped on the inside of the inner tube,

a filling gas filled up in said discharging vessel, and

a power supply for applying a voltage between said outer electrode and said inner electrode.

7 A decomposition apparatus as claimed in Claim 6, wherein said excimer lamp comprises:

said power supply applying a high frequency voltage from 1 to 20 MHz to a metal container and the inner electrode.

8 A decomposition apparatus as claimed in Claim 1, wherein a wave length of UV light is of 222nm or below.

9 A decomposition apparatus of an organic compound fluid such as a gas of an organic compound, a liquid thereof, a gas containing an organic compound and a liquid containing an organic compound, which comprises:

an excimer emission body equipped with an inner electrode,

a metal container equipped to the outside of said excimer emission body for filling up at least one selected from a liquid of an organic compound and a liquid containing organic compound ,

a power supply for applying a high frequency voltage between the inner electrode and the metal container, and

a UV light irradiated from said excimer emission body to said liquid in said metal container allows to generate OH radical and O radical in the liquid, and

the radical cutting some bond of the organic compound so that the organic compound in the liquid is decomposed easily.

10 A decomposition apparatus as claimed in Claim 9, wherein said excimer emission body comprises:

a discharging vessel made of a dielectric material with excellent permeability of UV light,

an inner tube equipped on the inside of said discharging vessel,

an inner electrode equipped on the inside of said inner tube, and

a filling gas filled up in said discharging vessel.

11 A decomposition apparatus as claimed in Claim 9, wherein said excimer lamp comprises:

said power supply applying a high frequency voltage from 1 to 20 MHz to the metal container and the inner electrode.

12 A decomposition apparatus as claimed in Claim 9, wherein

an organic compound is selected from flon, dioxin (polychlorinated dibenzo-para-dioxin), PCB (polychlorinated biphenyl), trichloroethylene, tetrachloroethylene, dichloromethane, tetrachloromethane, 1,2-dichloroethane, 1,1-dichloroethane, cis-1,2-dichloroethane, 1,1,1-trichloroethane, 1,3-dichloropropene and a mixture thereof.

13 A decomposition apparatus as claimed in Claim 9, wherein

a wave length of UV light is of 222nm or below.

14 A decomposition method for decomposing said organic compound, which is used in said decomposition apparatus as claimed in Claim 1, which comprises steps of:

flowing a fluid which is selected from a gas of an organic compound, a liquid thereof, a gas containing an organic compound and a liquid containing an organic compound during the emission of UV light which is irradiated from an excimer lamp, and

decomposing the organic compound in fluid during its flowing.

15 A decomposition method as claimed in Claim 14, wherein said fluid flows slowly at a flow rate buffering material during the emission of UV light.

16 A decomposition method as claimed in Claim 14, wherein said fluid contacts a catalyst for promoting the decomposition of an organic compound during the emission of UV light.

17 A decomposition method as claimed in Claim 14, wherein an organic compound is selected from flon, dioxin (polychlorinated dibenzo-para-dioxin), PCB (polychlorinated biphenyl), trichloroethylene, tetrachloroethylene, dichloromethane, tetrachloromethane, 1,2-dichloroethane, 1,1-dichloroethane, cis-1,2-dichloroethane, 1,1,1-trichloroethane, 1,3-dichloropropene and a mixture thereof.

18 A decomposition method as claimed in Claim 14, wherein a wave length of UV light is of 222nm or below.

19 An excimer lamp, which comprises:
a discharging vessel made of a dielectric material with excellent permeability of UV light,
an inner tube equipped on the inside of said discharging vessel,

an outer electrode equipped on the outside of the discharging vessel,
an inner electrode equipped on the inside of the inner tube, and
a filling gas filled up in the discharging vessel, and

a UV light is irradiated from the excimer lamp by which a high frequency voltage is applied between the outer electrode and the inner electrode from 1 to 20 MHz.

20 An excimer lamp as claimed in Claim 19, wherein
said inner tube is cooled by a nitrogen gas flowed in said inner tube.

21 An excimer lamp as claimed in Claim 19, wherein
d/D ratio, in which said "d" is an inner diameter of said inner tube
and said "D" is an outer diameter of said inner electrode, is of from 1.1 to
3.0.

22 An excimer lamp as claimed in Claim 19, wherein
L/D ratio, in which said "L" is a length of said inner electrode and
said "D" is an outer diameter of said inner electrode, is of from 10 to below
30.

23 An excimer lamp as claimed in Claim 19, wherein
at least one U-shaped inner tube of at least one or above is equipped
on the inside of said discharging vessel.

24 An excimer emission apparatus, which comprises:
said excimer lamp as claimed in Claim 19,
a power supply for applying a high frequency voltage from 1 to 20
MHz between said outer electrode and said inner electrode, and
a circulating cooling apparatus by the nitrogen gas to cool said inner
tube.

ABSTRACT OF THE DISCLOSURE

There are provided a decomposition apparatus by emission of a UV light which is irradiated from an excimer lamp, a decomposition method thereof and an excimer lamp and an excimer emission apparatus which may suitably be used for a decomposition apparatus and a decomposition method of an organic compound. The decomposition apparatus comprises an excimer lamp emitting UV light for decomposing the organic compound and a decomposition container provided with the excimer lamp for decomposing the organic compound in a liquid or a gas. In the decomposition apparatus, since the UV light irradiated from excimer lamp is emitted to the liquid or the gas, the organic compound in the liquid or the gas can be decomposed easily by the simple decomposition apparatus and method. The decomposition apparatus and method are effective to decompose the organic compound, such as dioxin (polychlorinated dibenzo-para-dioxin), PCB (polychlorinated biphenyl), trichloroethylene or the like, polluting the air or water to purify the environment.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

NAKAMURA

Atty. Ref.: 1767-72

Serial No. Not Yet Assigned

Group: 1741

Filed: October 25, 2000

Examiner: Williams

For: DECOMPOSITION APPARATUS OF ORGANIC
COMPOUND, DECOMPOSITION METHOD THEREOF,
EXCIMER UV LAMP AND EXCIMER EMISSION
APPARATUS

* * * * *

October 25, 2000

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Attention: Chief Draftsperson

**REQUEST FOR APPROVAL OF
PROPOSED DRAWING AMENDMENTS**

Approval is requested for the proposed drawing amendments shown in red on the
attached photocopy of Figures 26A and 26B.

Respectfully submitted,

NIXON & VANDERHYE P.C.

By: 

Michelle N. Lester

Reg. No. 32,331

MNL:slj
1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

FIG.25


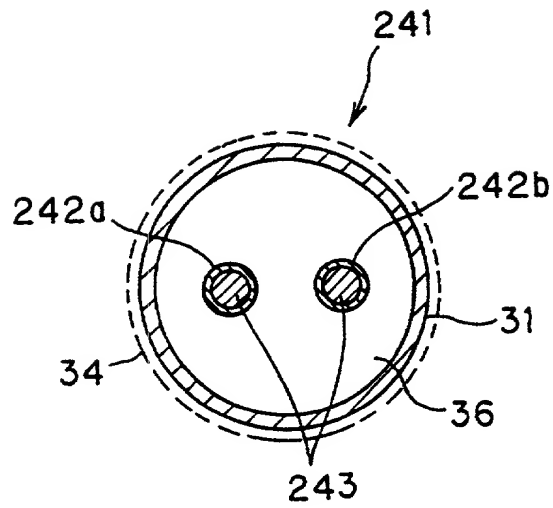


FIG.26A

FIG.26B

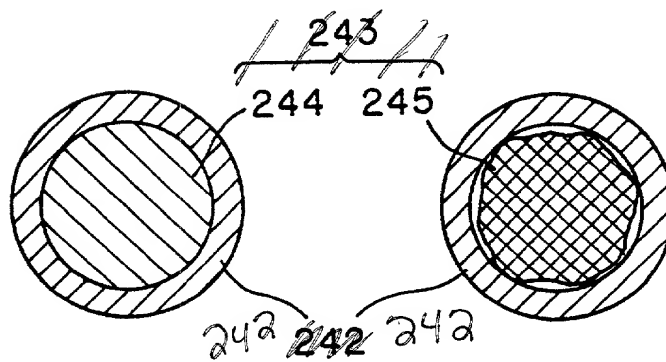

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

NAKAMURA

Serial No. Not Yet Assigned

Atty Ref.: 1767-72

Filed: October 25, 2000

Group: 1741

For: DECOMPOSITION APPARATUS OF
ORGANIC COMPOUND, DECOMPOSITION
METHOD THEREOF, EXCIMER UV LAMP
AND EXCIMER EMISSION APPARATUS

Examiner: Williams

* * * * *

October 25, 2000

Assistant Commissioner for Patents
Washington, DC 20231

SUBMISSION OF FORMAL DRAWINGS


Sir:

Enclosed herewith are 24 sheets of formal, inked drawings for the above-identified application.

Respectfully submitted,

NIXON & VANDERHYE P.C.

By:



Michelle N. Lester

Reg. No. 32,331

MNL:slj
1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

FIG.1

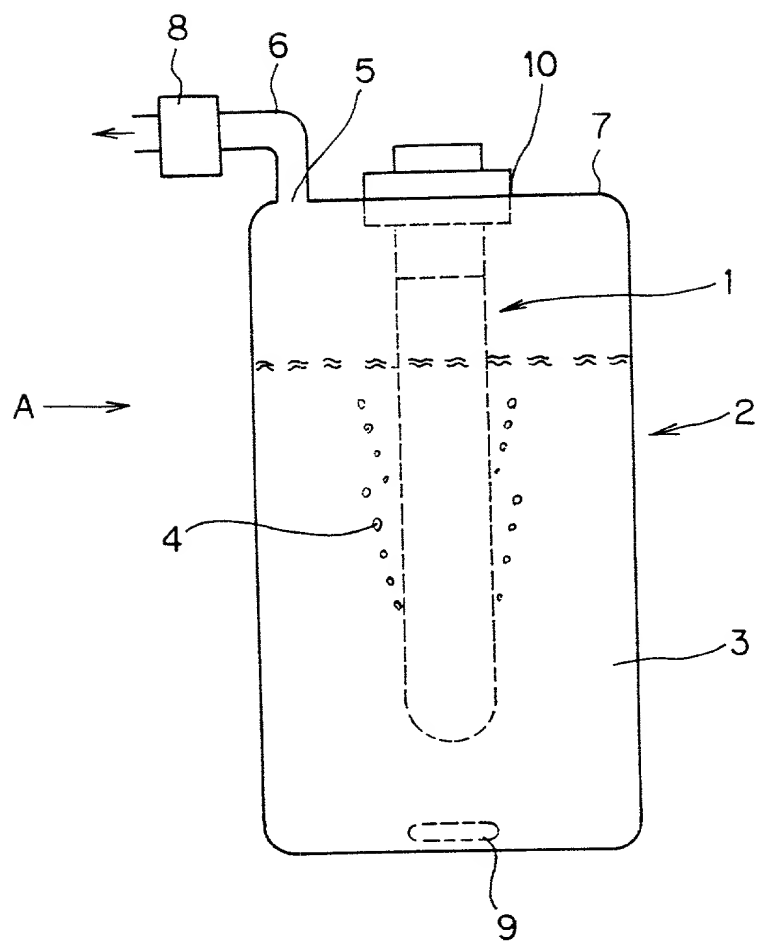


FIG.2

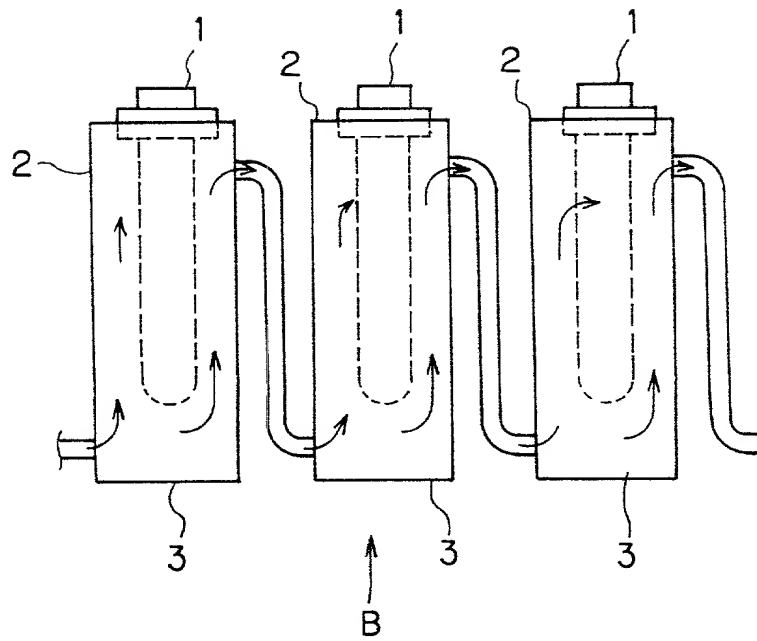


FIG.3

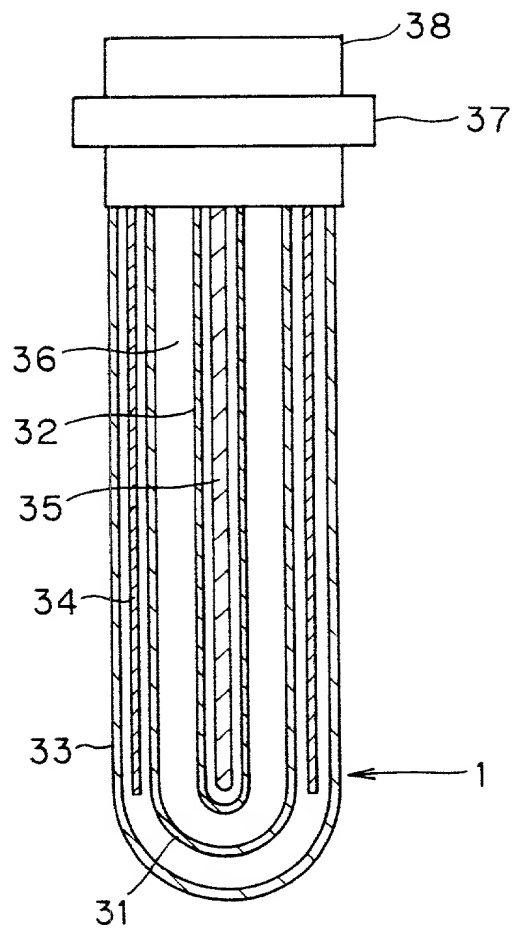


FIG.4

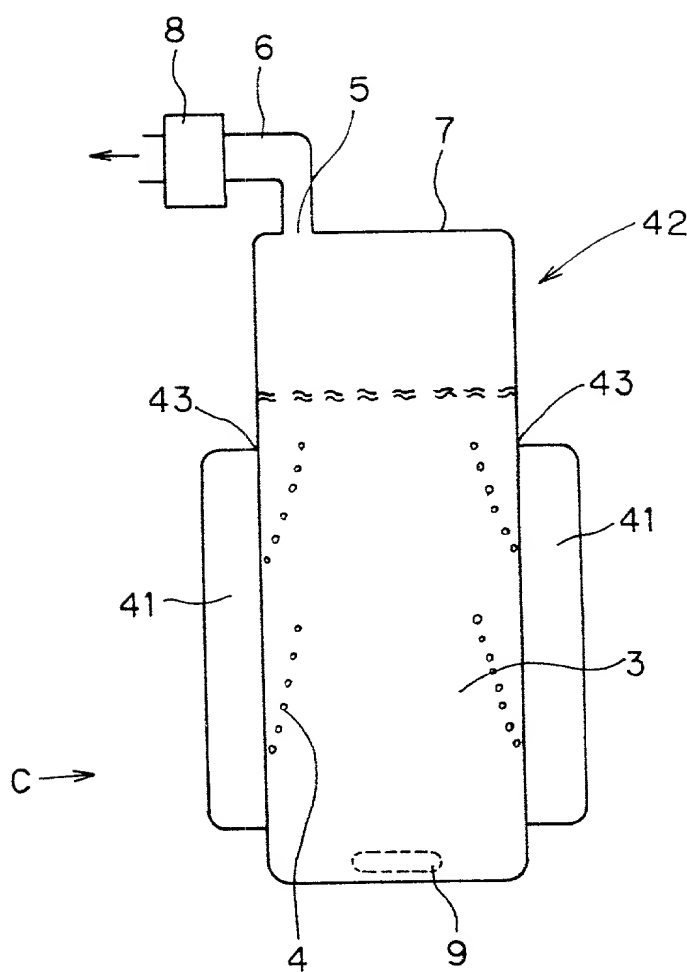


FIG.5

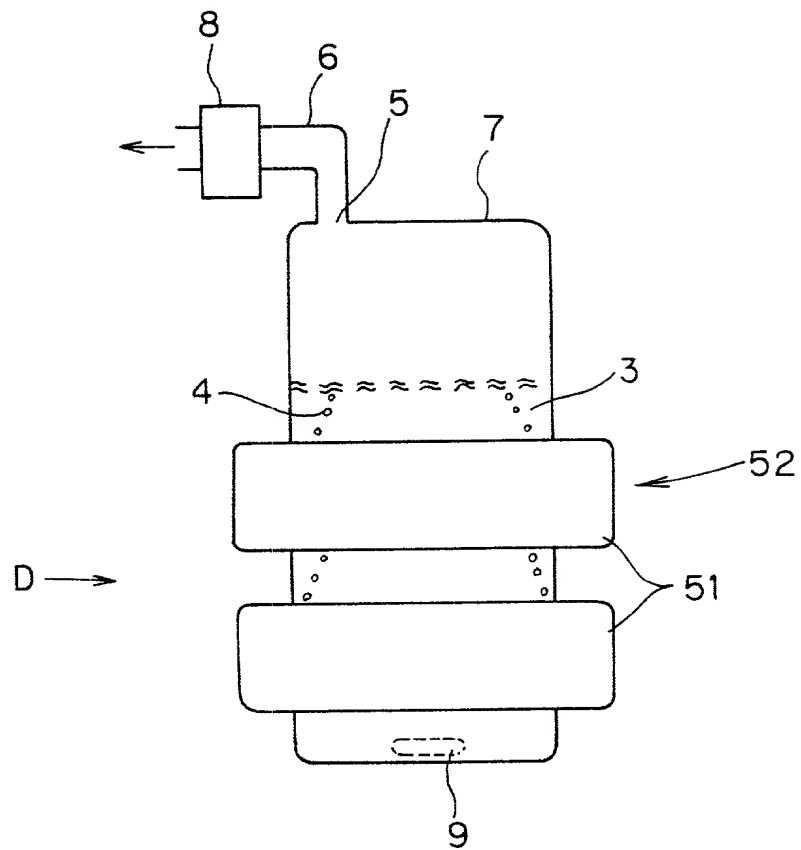


FIG.6

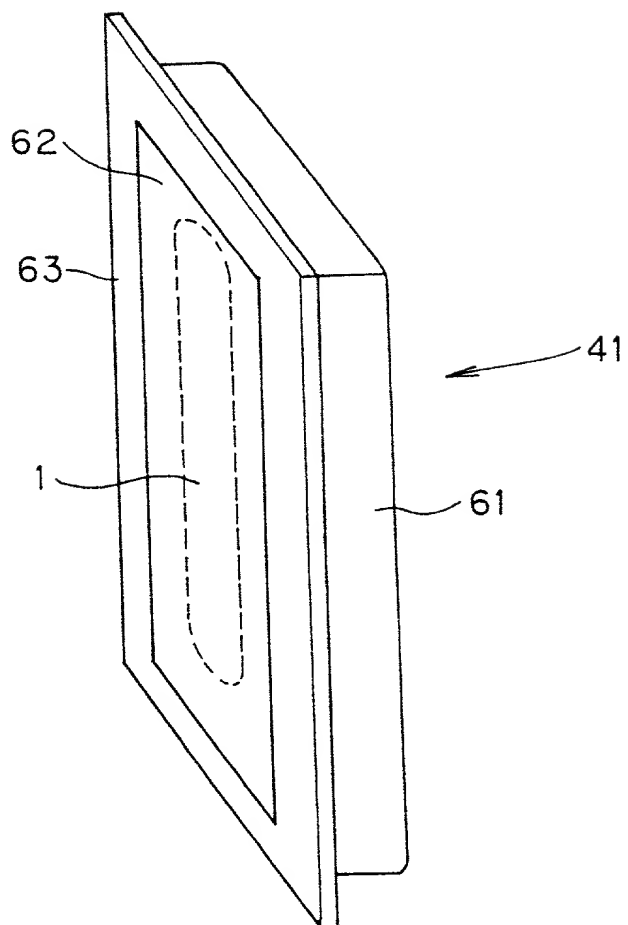


FIG. 7


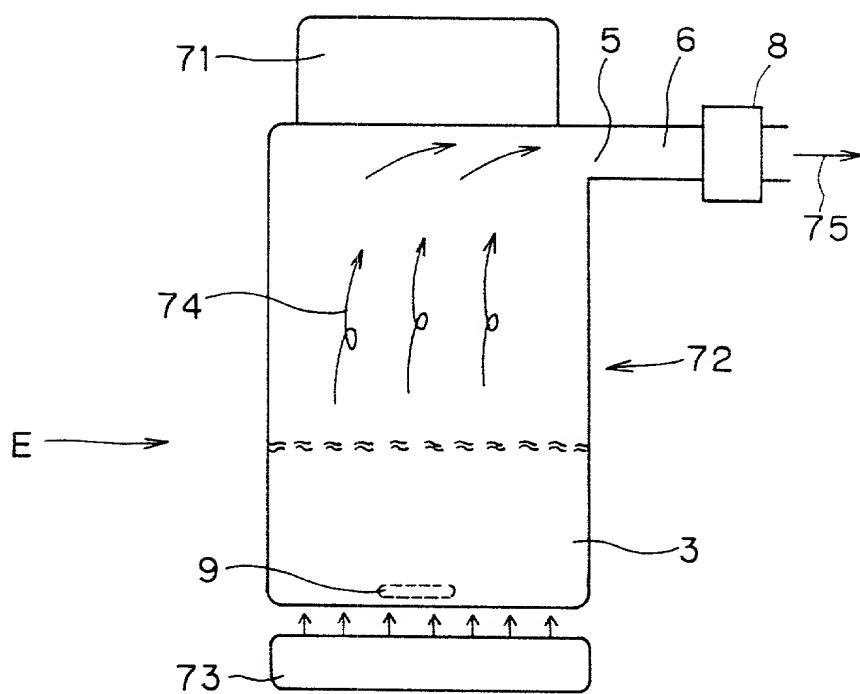


FIG.8

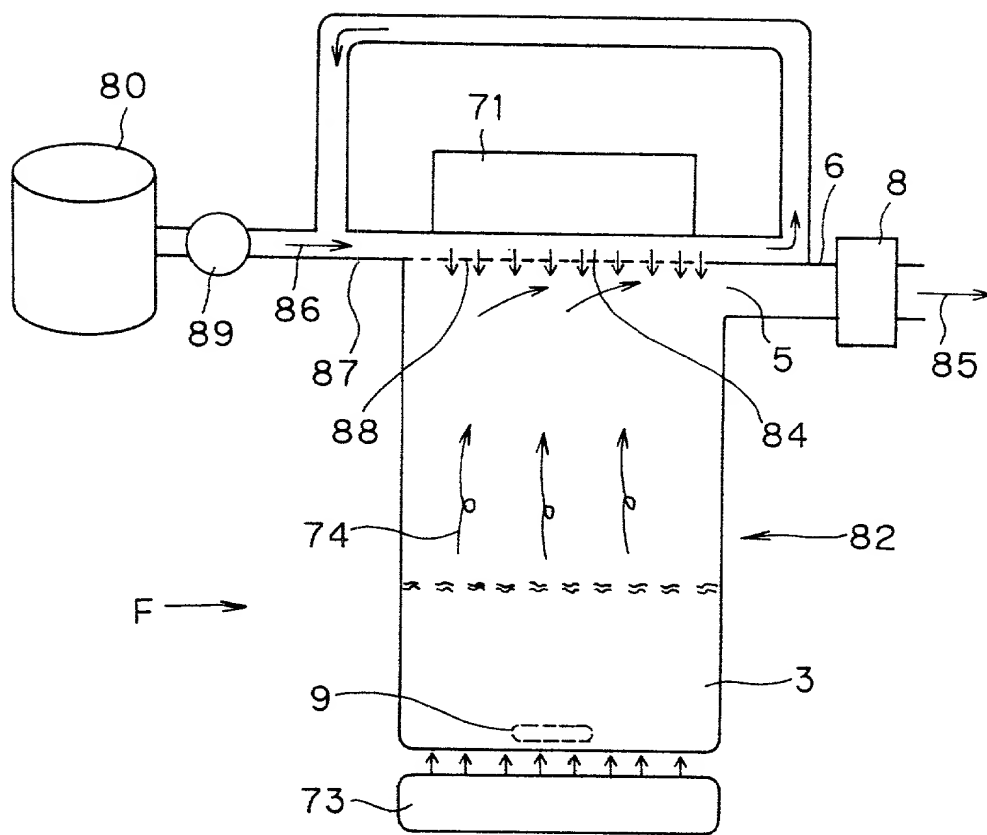

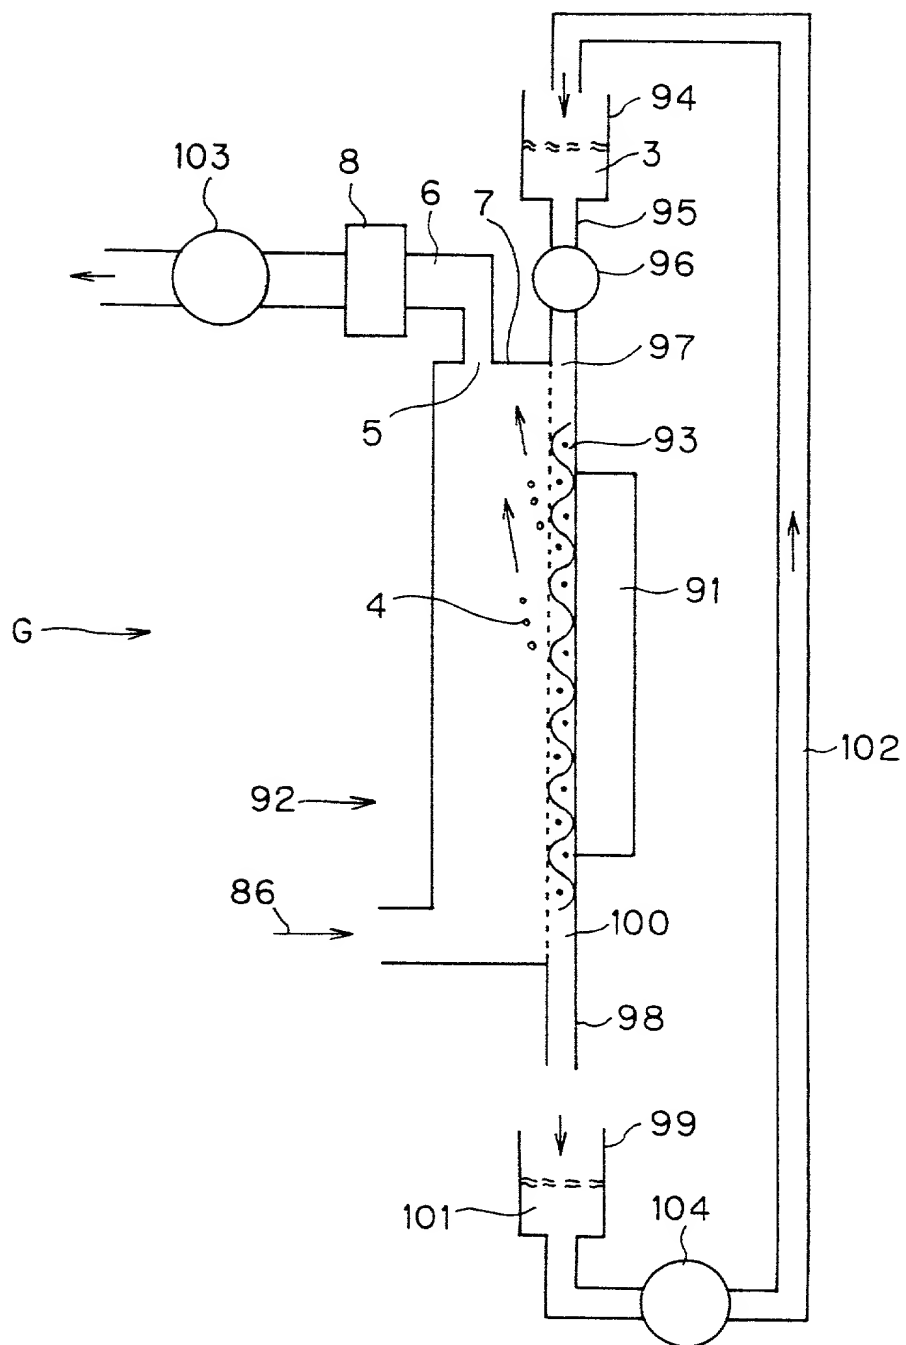
[illegible]

FIG.10A

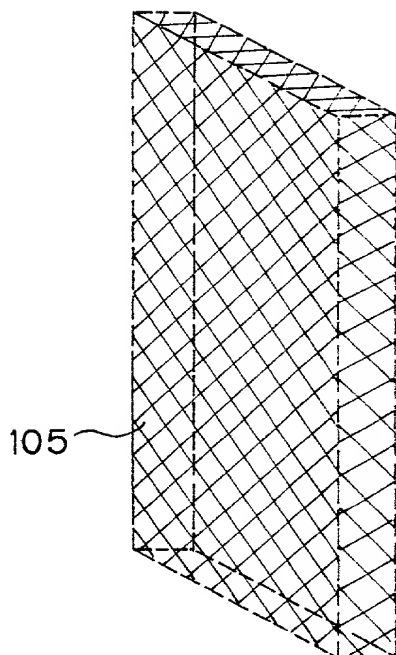


FIG.10B

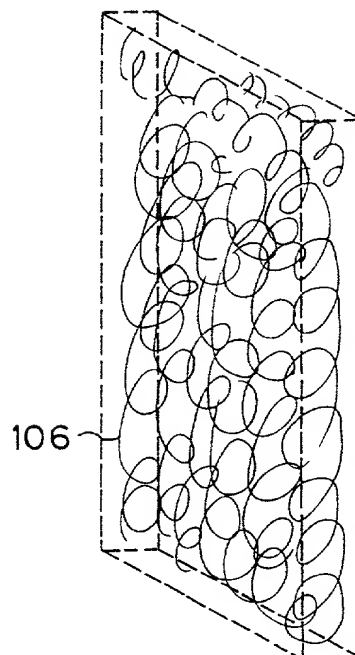


FIG.11

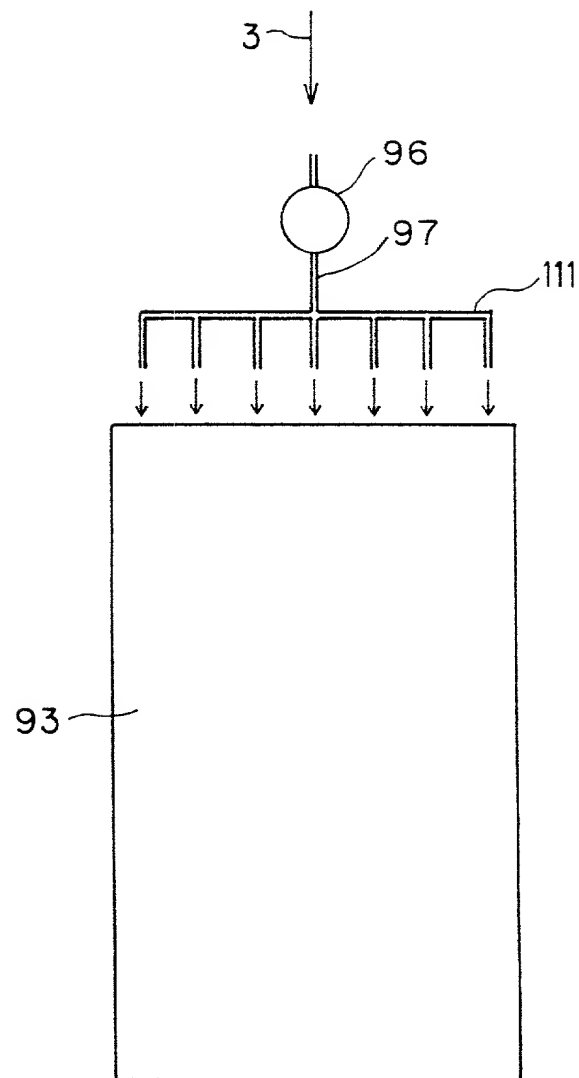


FIG.12

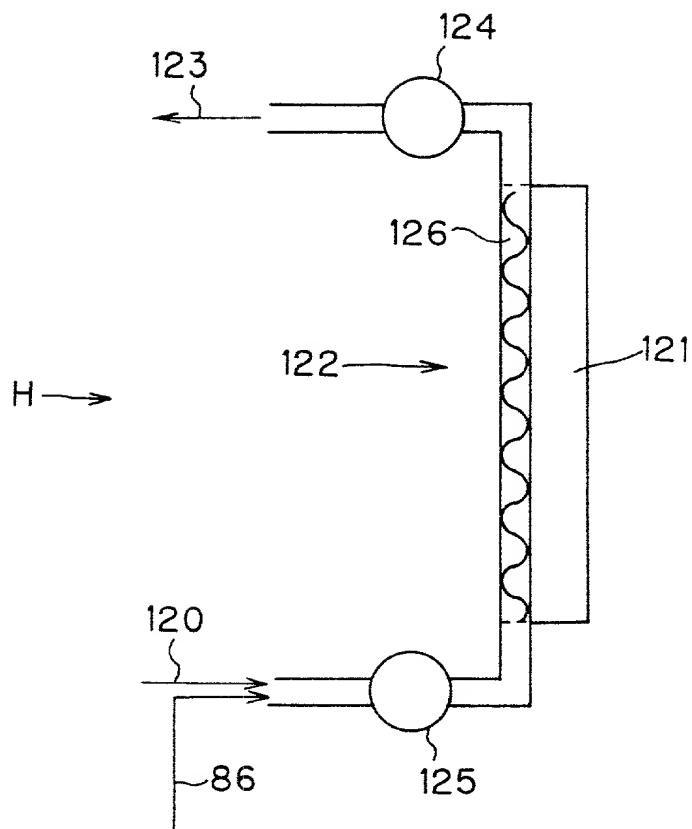


FIG.13

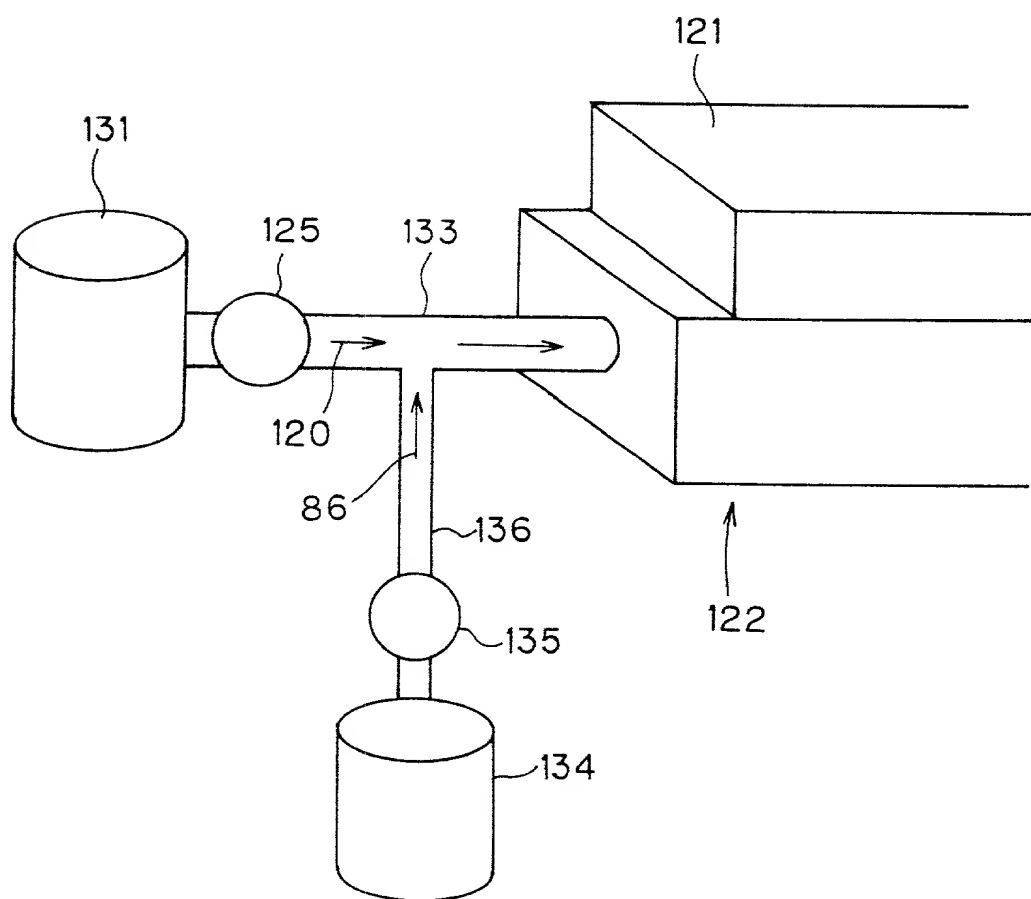


FIG.14A

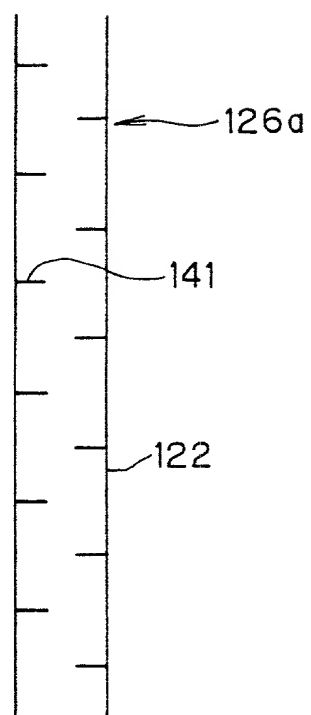


FIG.14B

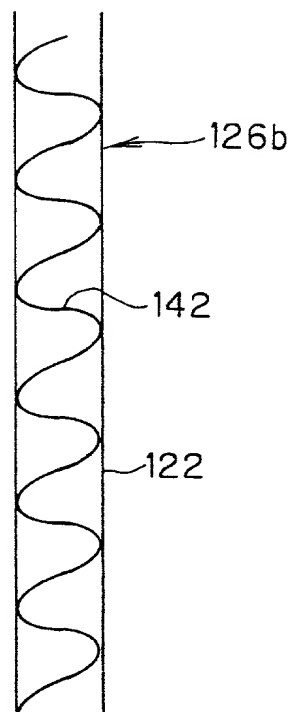


FIG.15

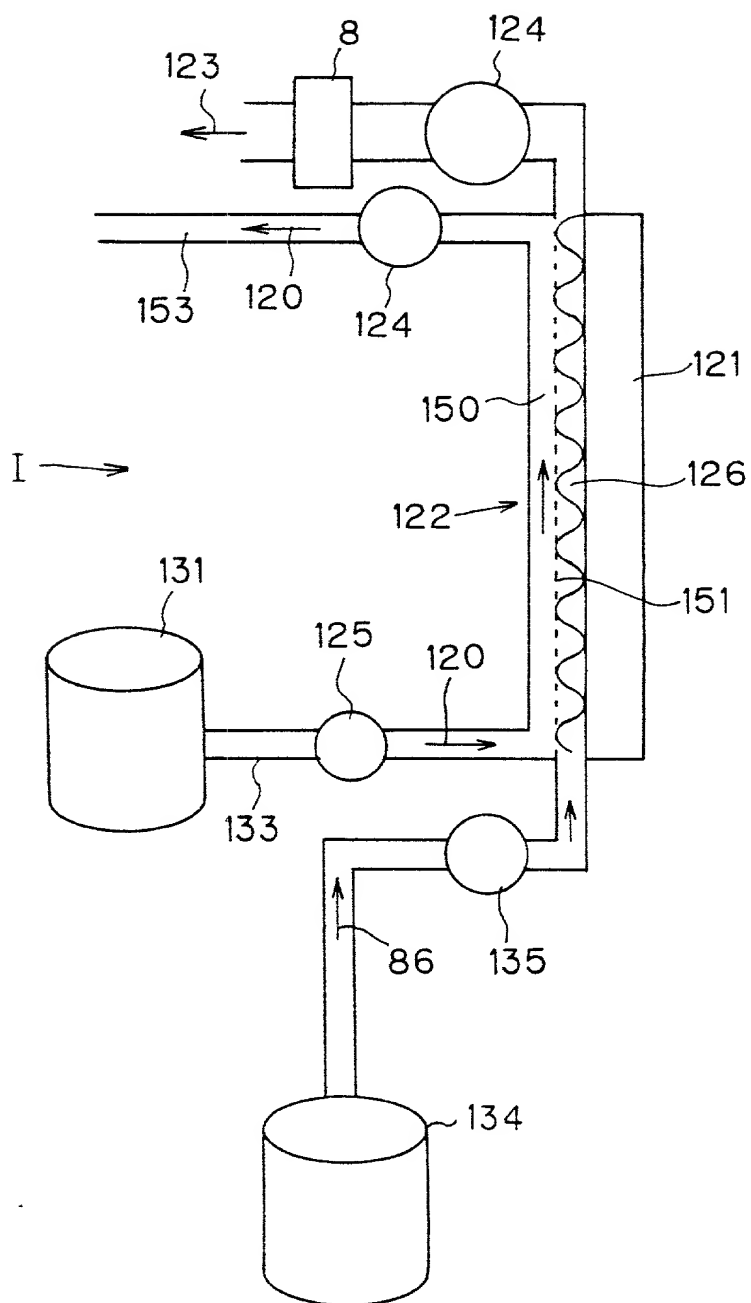


FIG.16

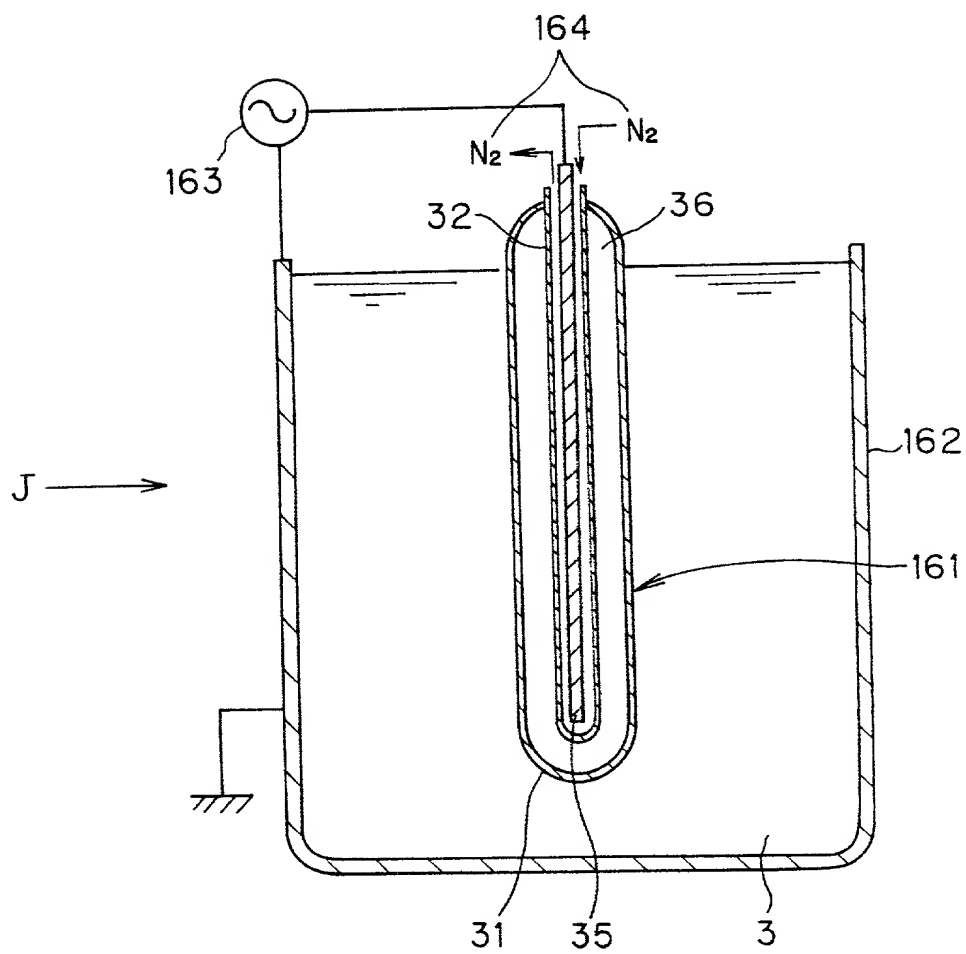


FIG.17

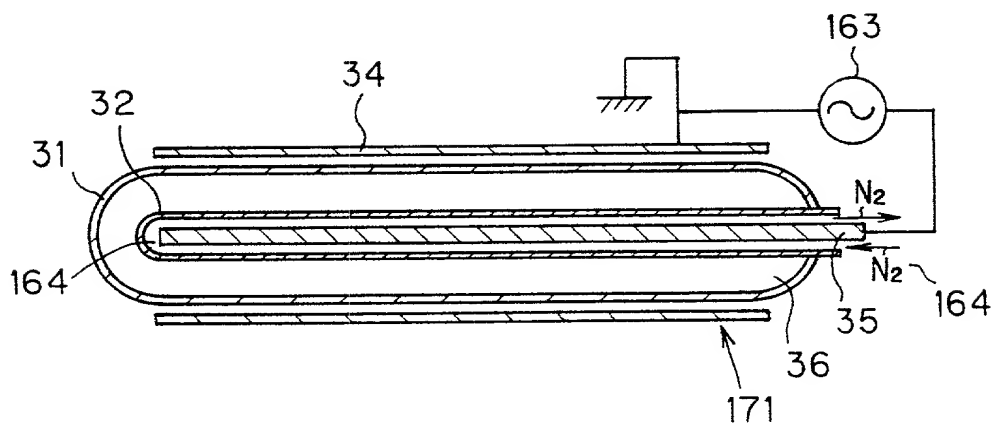


FIG.18

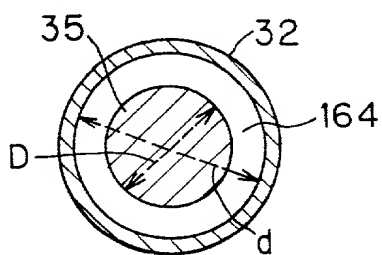


FIG.19

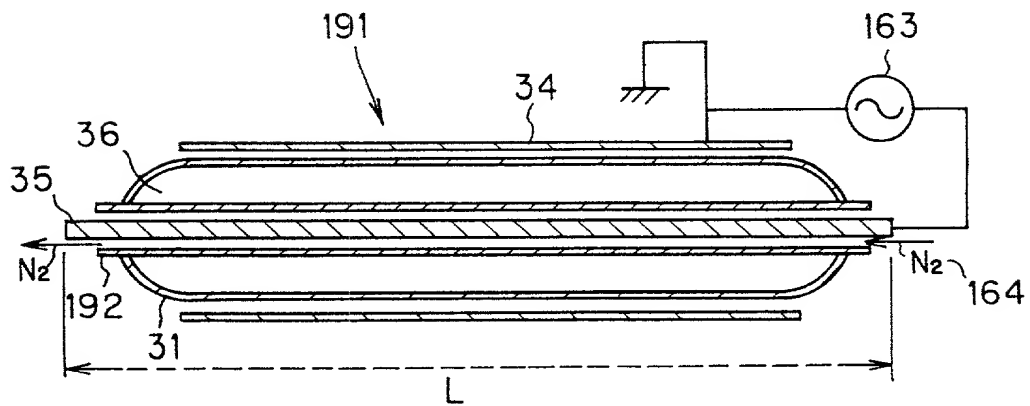


FIG.20

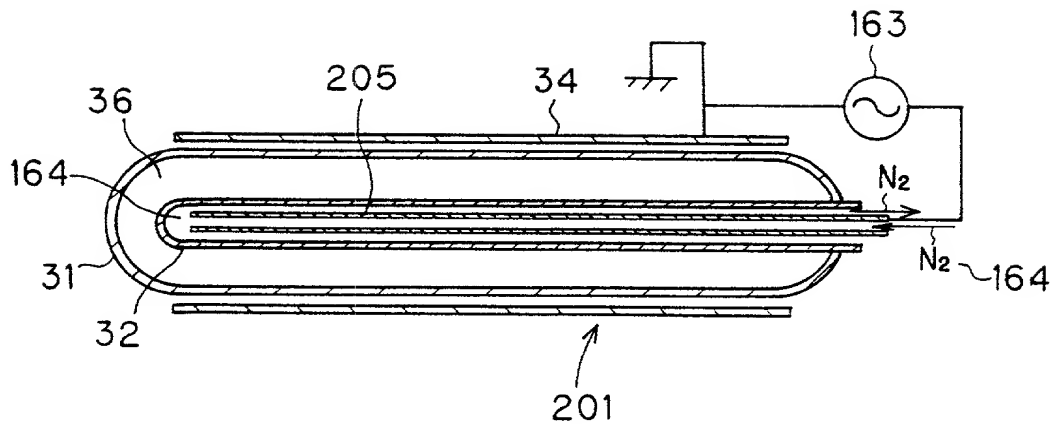


FIG.21

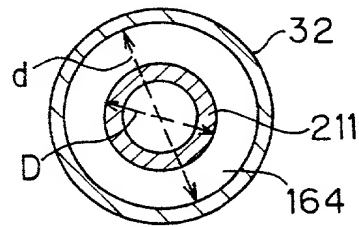


FIG.22




FIG.23




FIG.24

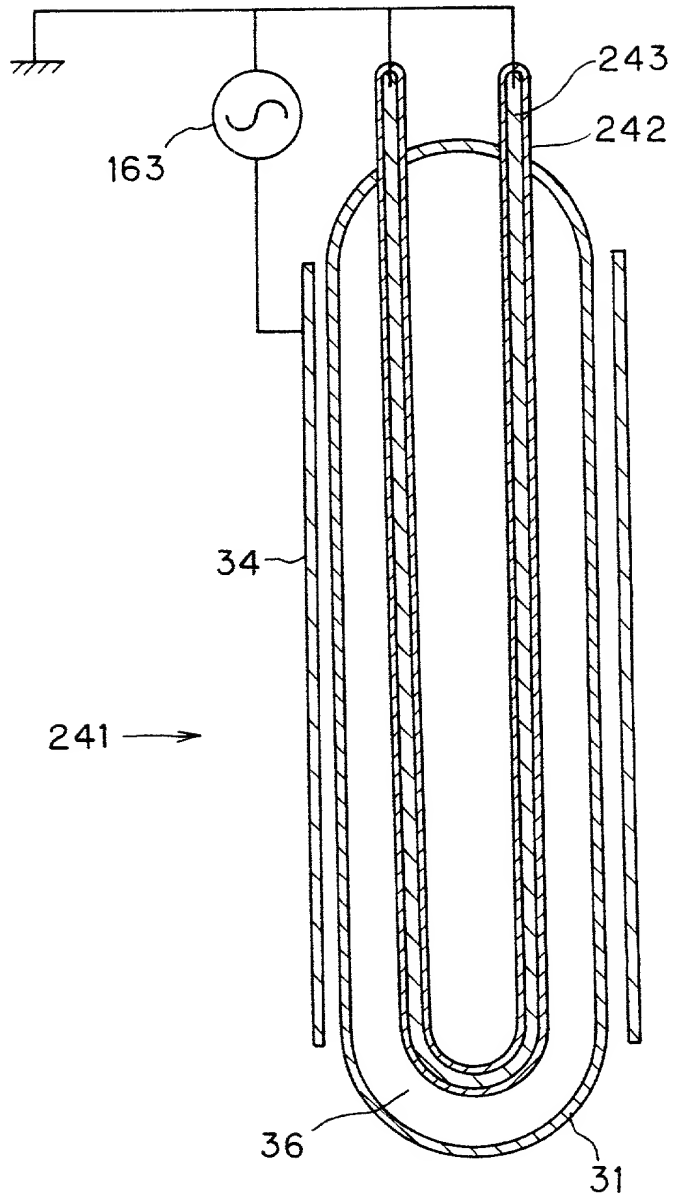


FIG.25

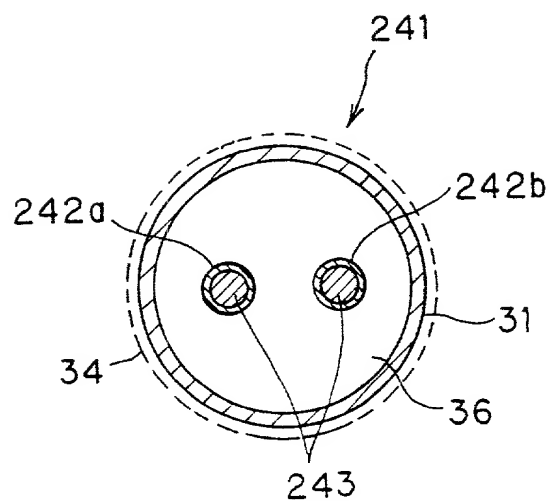


FIG.26A

FIG.26B

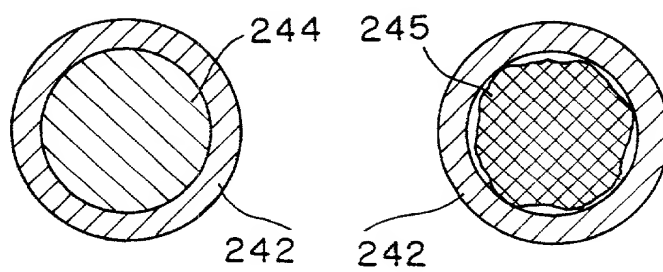


FIG.27

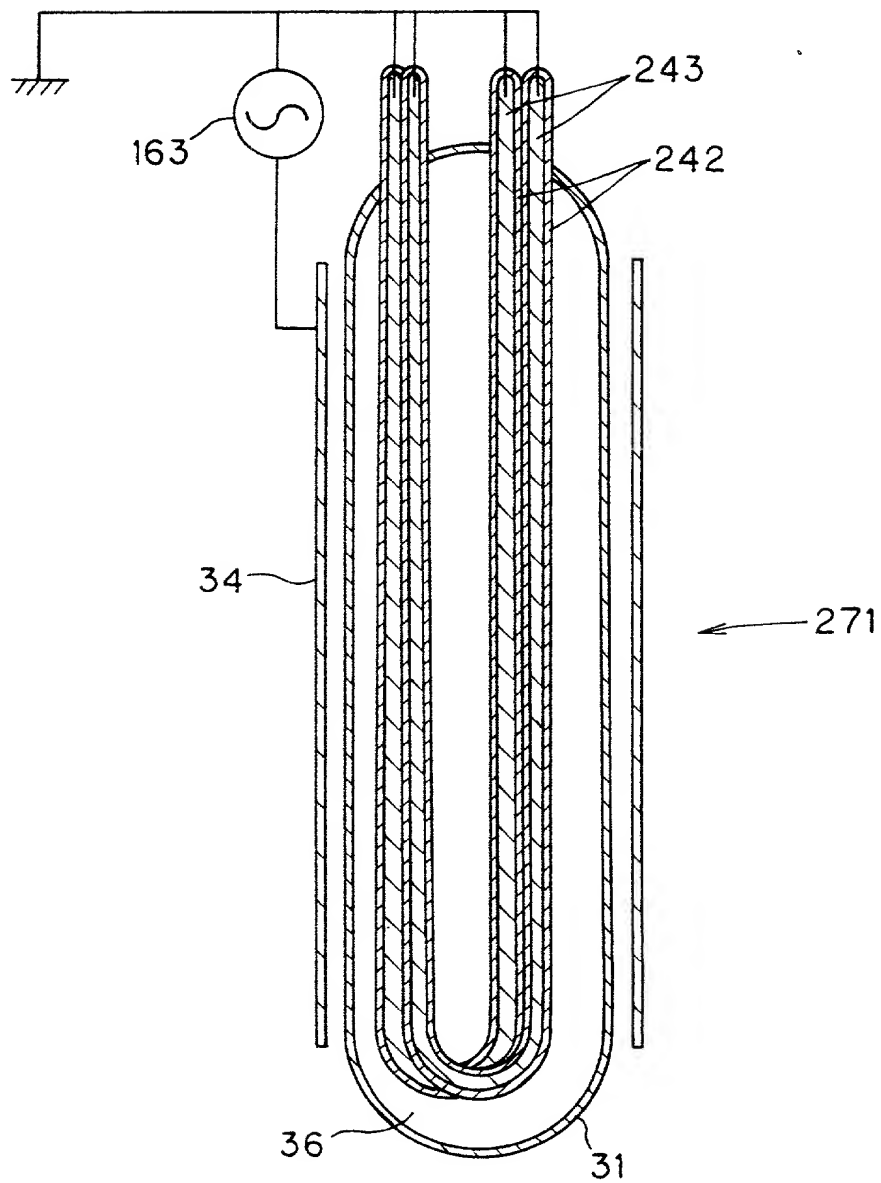


FIG. 28


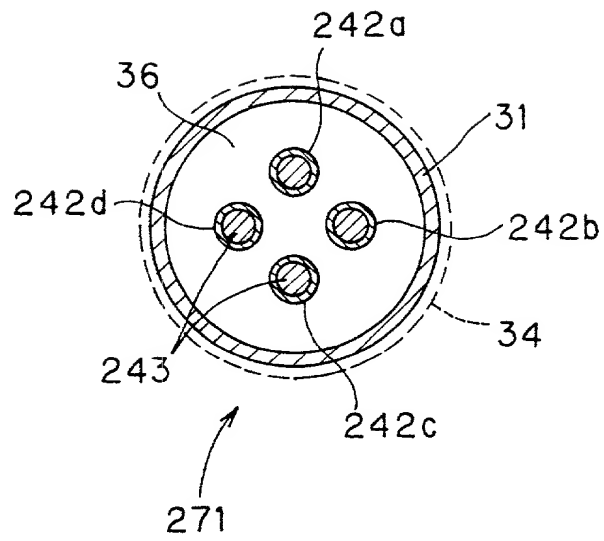


FIG. 29

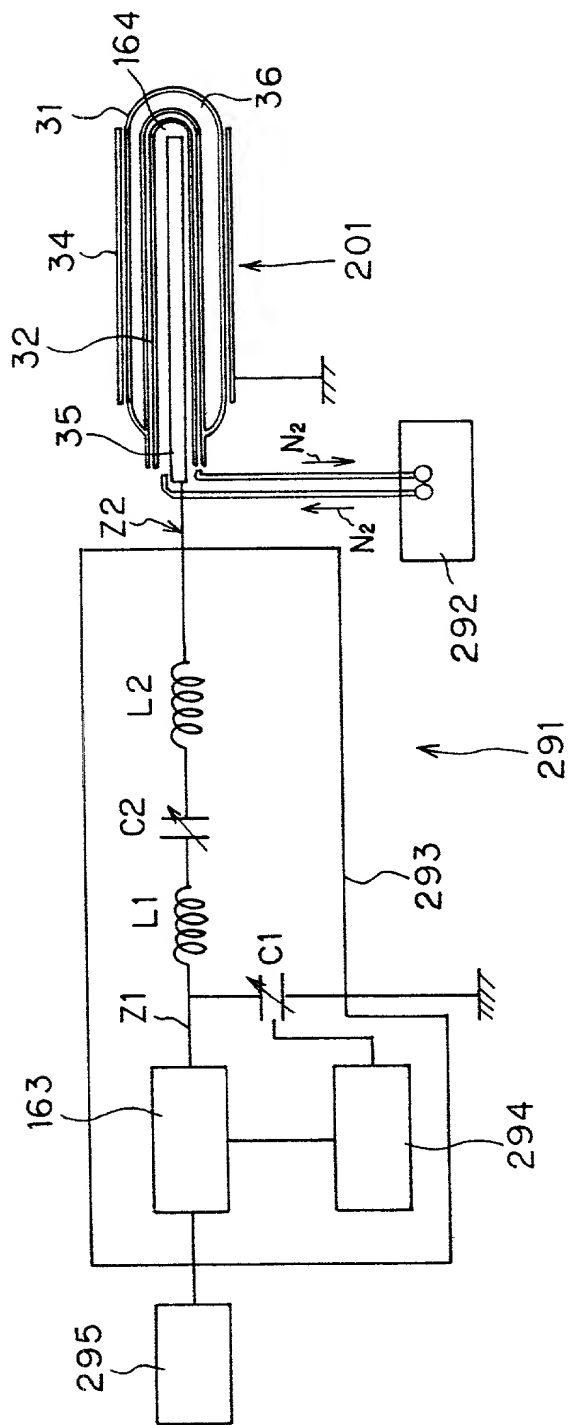

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DECOMPOSITION APPARATUS OF ORGANIC COMPOUND, DECOMPOSITION METHOD THEREOF, EXCIMER UV LAMP AND EXCIMER EMISSION APPARATUS the specification of which (check applicable box(es)):

[] is attached hereto.

was filed on August 11, 1998 as U.S. Application Serial No. 09/132,215

_____ was filed as PCT international application No. PCT/_____/_____ on _____

and (if applicable to U.S. or PCT application) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 C.F.R. 1.56(a). I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed or, if no priority is claimed, before the filing date of this application:

Prior Foreign Application(s):

Application Number	Country	Day/Month/Year Filed
P09-28071	Japan	12/02/1997
P09-360940	Japan	26/12/1997
P10-127195	Japan	11/05/1998
P10-136229	Japan	19/05/1998

I hereby claim the benefit under 35 U.S.C. 120/365 of all prior United States and PCT international applications listed above or below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior applications in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. 1.56(a) which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

Prior U.S./PCT Application(s):

Application Serial No.	Day/Month/Year Filed	pending, abandoned
------------------------	----------------------	--------------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint NIXON & VANDERHYE P.C., 1100 North Glebe Road, 8th Floor, Arlington, Virginia 22201-4714, telephone (703) 816-4000 (to whom all communications are to be directed), and the following attorneys thereof (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent: Arthur R. Crawford, 25327; Larry S. Nixon, 25640; Robert A. Vanderhye, 27076; James T. Hosmer, 30184; Robert W. Faris, 31352; Richard G. Besha, 22770; Mark E. Nusbaum, 32348; Michael J. Keenan, 32106; Bryan H. Davidson, 30251; Stanley C. Spooner, 27393; Leonard C. Mitchell, 29009; Duane M. Byers, 33363; Paul J. Henon, 33626; Jeffrey H. Nelson, 30481; John R. Lastova, 33149; H. Warren Burnam, Jr., 29366; Thomas E. Byrne, 32205; Mary J. Wilson, 32955.

1) Inventor's Signature _____ Date August 2, 1999

Inventor's Name (typed)	Masaru	NAKAMURA	Japanese
	First	Middle Initial	Family Name
			Citizenship

Residence (City) Chigasaki-shi (State/Foreign Country) Kanagawa-ken, Japan
 Post Office Address c/o Quark Systems Co., Ltd. MOC Chigasaki Building,
1-6-27, Tomoe, Chigasaki-shi, Kanagawa-ken, Japan Zip Code 253-0056

2) Inventor's Signature _____ Date _____

Inventor's Name (typed)			
First	Middle Initial	Family Name	Citizenship

Residence (City) _____ (State/Foreign Country) _____

Post Office Address _____ Zip Code _____

3) Inventor's Signature _____ Date _____

Inventor's Name (typed)			
First	Middle Initial	Family Name	Citizenship

idence (City) _____ (State/Foreign Country) _____

Post Office Address _____ Zip Code _____

FOR ADDITIONAL INVENTORS, check box ☐ and attach sheet with same information and signature and date for each.